
Type CKL20 Concrete Laydown Kibble

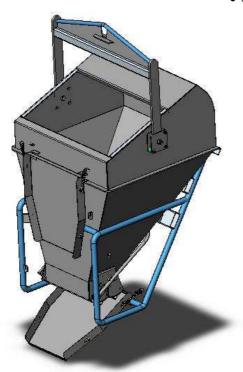


Concrete Kibbles have been designed for easy transfer of concrete on site by overhead crane.

The type CKL20 Concrete Laydown Kibble is a heavy duty roll-over style Kibble for use by overhead crane. This style Kibble is suitable for large applications having a Safe Working Load of 5000kg and a volume capacity of 2.0 cubic metres. The type CKL20 Kibble can be used for both bottom discharge or front discharge with the use of the adjustable chute. This unit is lever operated from either side, allowing flexible operation. The unit has been fitted with Forklift pockets for transport purposes about the work site and has a storage facility for the chute (shown opposite).

SPECIFICATIONS:

- Safe Working Load (SWL) 5000kg
- Volume Capacity 2.0 cubic metres
- Unit Weight 905kg
- Fork Pocket Size 165 x 65mm
- Fork Pocket Centres 400mm
- Painted 'Safety Yellow" enamel

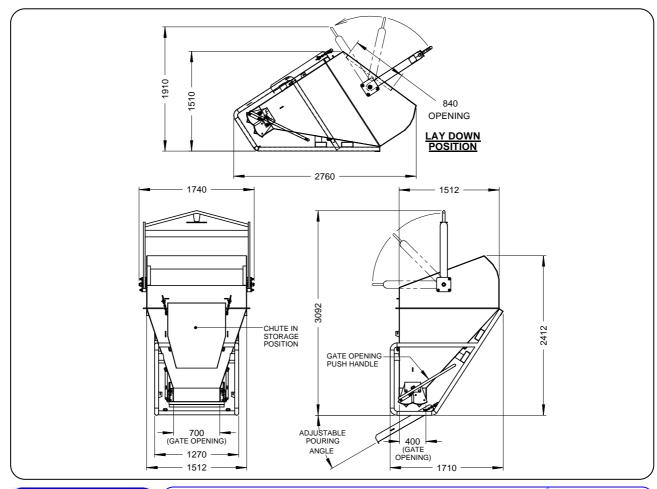

EAST WEST
ENGINEERING
ADVISION OF ALLMESH ENGINEERING DIX LID

Drawing: CKL20-Sales

Issue: **B** — 30th July 2010

Sheet: 1 of 1

East West Engineering Phone +61 2 9938 0644 Fax +61 2 9938 0655