



BELT CONVEYORS



GB-17.07.17



2.0 M




3.3 M



4.5 M



6.0 M

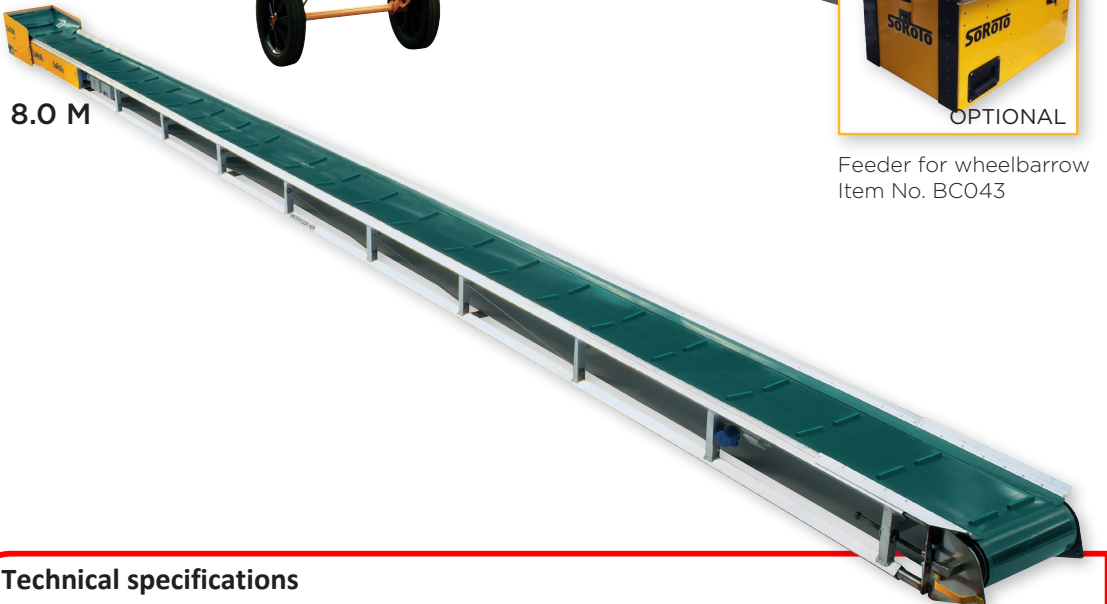

8.0 M



Undercarriage
Item No. BC041



Truck pockets / 2 pcs
Item No. BC075



Feeder for wheelbarrow
Item No. BC043

- Move 322 tons per day – and save time!
- Easy to operate
- Lightweight – yet robust
- Low maintenance and easy to clean
- Undercarriage and standard feeder box is incl.
- PVC belt with or without carriers

The lightweight SoRoTo belt conveyors have an aluminium frame and stainless steel runners.

For professional use as well as DIY.

Is serial connection ready.

No limit to what you can move with a SoRoTo belt conveyor

Item No. 2000



Item No. 3300



Item No. 4500



Item No. 6000



Item No. 8000



Technical specifications

| Belt Conveyor | 2.0 m | 3.3 m | 4.5 m | 6.0 m | 8.0 m |
|----------------------------|------------|------------|------------|------------|------------|
| Weight incl. Undercarriage | 55 kg | 78 kg | 88 kg | 106 kg | 139 kg |
| Length | 2.2 metres | 3.3 metres | 4.7 metres | 6.2 metres | 8.1 metres |
| Max. Amp | 4 Amp | 4 Amp | 6 Amp | 6 Amp | 6 Amp |
| Motor | 0.50 kW | 0.50 kW | 0.50 kW | 0.55 kW | 0.55 kW |
| Width | 48 cm | 48 cm | 48 cm | 48 cm | 48 cm |
| Height | 23 cm | 23 cm | 23 cm | 23 cm | 23 cm |
| Lifting height | 30°/45° | 30°/45° | 30°/45° | 30°/45° | 30°/45° |
| Band speed | 32 cm/sek | 32 cm/sek | 32 cm/sek | 32 cm/sek | 32 cm/sek |
| Power | CEE | CEE | CEE | CEE | CEE |
| Standard belt | PVC | PVC | PVC | PVC | PVC |

For further details
- turn the page...



INCLINATION



GB-17.07.17

