Canter 515 Wide Cab Pantech

4X2 / WIDE CAB / DUONIC DCT



GVM GCM

4,495 KG 7,995 KG Can be driven on a passenger car license

Power/Torque

110 KW / 370 NM



CANTER 縣货

OUR SAFEST CANTER EVER WITH AEBS, LDWS AND ESP STANDARD FRP OR LIGHTWEIGHT HONEYCOMB BODY OPTIONS



Specifications

MODEL

- 4x2 515 Built Ready Wide Cab FRP Pan MWB 6 Sp. Duonic DCT (FEB21ER3SFBC-B03) 4x2 515 Built Ready Wide Cab Honeycomb Pan MWB 6 Sp. Duonic DCT
- В
- (FEB21ER3SFBC-B3A)
- 4x2 515 Built Ready Wide Cab FRP Pan MWB 6 Sp. Duonic DCT (FEB21ER3SFBC-B3B)

WHEEL BASE 3400mm

Clutch

GVM (optional) 4,495kg

(optional) 7,995kg 7,995kg 7,995kg

GCM

3400mm 4,495kg 3400mm 4,495kg

Engine	
Engine Version	FUSO 4P10-T4 Diesel
Configuration	4 Cyl. In-line DOHC, 4-Valve
Туре	Variable Geometry Turbo Charged
	Air to Air Intercooled
Displacement	3 litre (2998cc)
Bore	95.8mm
Stroke	104mm
Power (DIN)	110kW @ 2840~3500 rpm
Torque (DIN)	370Nm @ 1350~2840 rpm
Maximum Engine Speed	4100 rpm
Compression Ratio	17.5:1
Cooling System / Oil Cooler	Water cooled,13.7L capacity/ Plate type engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Emission Control	Diesel Particulate Filter (DPF) Exhaust Dash Display DPF Status 0~9 (Empty~Full) Parked Regeneration possible from 7~9
Emission Level	ADR 80/03 & EEV rated (Enhanced Environmentally- Friendly Vehicle) Euro 5

	140 120 100	<i>/</i>	_			<u></u>	<u>_</u>]	450 400 350 300 250	TORQUE (Nm)
POWER (kW)										
WE	80	Γ								
P0	60	-								
	40	-								
	20	L <u></u>								
		1000	1500	2000	2500	3000	3500	4000		
					IE SPEED					

Fuel	
Injection System	Bosch Common Rail Direct Injection Bosch Piezo Technology Injectors
Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity *	100 Litres
Filtration	Filter with Water Separator and Indicator Sensor
Notes	*Max Fill to approx 95% of Air Capacity

Fan Drive	Thermo modulated	d continuous control (Viscou	ıs)
Radiator	Corrugated Fin wit	h Expansion Tank	
Electrical			
Voltage	12V Negative Eart	h	
Alternator Capacity	A B 12V-110 amp	C 12V-140 amp	

12V-2.0kW

2x12V, 70Ah/5hr 115D31LX2 Halogen 2x55W/60W

Cooling

Starter Capacity

Battery Capacity
Battery Specification
Headlamp Type
Headlamp Capacity

Clutch Model	Duonic Automated Manual (no clutch pedal)
Туре	Dual Clutch (Wet Multi-plate)
Transmission	
Version	FUSO Duonic M038S6
Type/Speeds	6 Speed Dual Clutch with Auto and Manual Modes

Version	FUSO Duonic M038S6
Type/Speeds	6 Speed Dual Clutch with Auto and Manual Modes
Features	Virtually Instant Gear Changes
	In-Dash Gear Lever with Park Brake Position
	ECO Mode to Minimise Fuel Usage
Ratios	1st: 5.397
	2nd: 3.788
	3rd: 2.310
	4th: 1.474
	5th: 1.000
	6th: 0.701
	Rev. 5.397
PTO Opening	LH Side

Front Axle	
Axle Version	FUSO F200T
Туре	Independent Front Suspension
Capacity *	2300kg
Notes	*See MAX LOADING for vehicle capacity.

Front Suspension	
Туре	Double Wishbone Independent Front Suspension with

Rear Axle	
Туре	Full Floating Banjo Type
Axle Version	FUSO R030T
Capacity*	3800kg
Ratio	4.444:1
Notes	*See MAX LOADING for vehicle capacity.

Rear Suspension	
Туре	Steel Suspension
Details	Parabolic Leaf with Shock Absorbers
Size Main Leaves	1100x70mm

Max Loading		
Front	2180kg	
Rear	3800kg	
Total	4495kg	

Steering		
Туре	Rack & Pinion	
Steering Column	Tilt/Telescopic Adjustable	
Power Assist	Standard	

Brakes	
Туре	Hydraulic Dual Circuit with Front and Rear Discs Single Calliper Front and Rear
Size Front	219x28mm
Size Rear	219x28mm
Features	Exhaust Brake Brake Priority System
Park Brake	Transmission Mounted

Specifications

MODEL A 4x2 515 Built Ready Wide Cab FRP Pan MWB 6 Sp. Duonic DCT (FEB21ER3SFBC-B03) 4x2 515 Built Ready Wide Cab Honeycomb Pan MWB 6 Sp. Duonic DCT (FEB21ER3SFBC-B3A) C 4x2 515 Built Ready Wide Cab FRP Pan MWB 6 Sp. Duonic DCT (FEB21ER3SFBC-B3B)

WHEEL	GVM	GCM
BASE	(optional)	(optional)
3400mm	4,495kg	7,995kg
3400mm	4,495kg	7,995kg
3400mm	4,495kg	7,995kg

Wheels & Tyres	
Wheel Type	7 x Single Piece Disc Rims (Including Spare)
Wheel Size	16.0x5.5K-115
Wheel Stud Pattern	5 Stud 208 PCD
Tyre Size All	185/85R16 111/109
Spare Tyre Carrier	Provided

Chassis	
Type Reinfo	rced Tapered Channel
Size 188x60	0x4mm
Width 748mn	1
Tensile Strength 540Mp	a

Instruments		
Gauges	Speedometer with Odometer Tachometer Fuel Level Water Temperature	
Colour Information Display	A B Fuel Consumption DPF Bar Chart from 1-9 Water Temperature Lane Departure Warning Maintenance Reminder System Tripmeters	C Fuel Consumption DPF Bar Chart from 1~9 Water Temperature Maintenance Reminder System Tripmeters

Satellite Navigation	Maps with heavy vehicle weight, length, height & hazardous material selectable restrictions with 3 years of Map updates
Colour Display	7 inch LCD with touch screen control
Phone Connectivity	Bluetooth® hands free
Audio Visual Entertainment	Bluetooth® music streaming compatible Digital radio DAB+ (also AM/FM for areas not covered by DAB+) USB & 3.5mm/AUX port
Reversing Camera Compatible	1 Reverse Camera fitted as standard Display can accept up to 4 additional cameras#
Optional Accessories (available at additional cost)	Rear Mounted Parking Sensor Kit (High or Low) USB Quick Charge Kit Qi Wireless Charging Pocket for Mobile Devices Tyre Pressure Monitoring System
Notes	# Cameras available through spare parts

Standard Features		
Airbag(s)	Dual Air Bags and Seat Belt Pre-Tensioners (Driver & Far Side Passenger)	
Active Safety Features	ABS plus Electronic Brake force Distribution (EBD) Advanced Emergency Braking (AEBS) Anti-Slip Regulator (ASR) Electronic Stability Program (ESP) Lane Departure Warning System (LDWS)	
Cruise Control	Yes	
Hill Start System	Yes	
Cab Cooling & Heating	Air Conditioner / Heater / Demister	
Accessory Power	12V Accessory Power Outlet / Cigar Lighter	
Driving	Fuso Multimedia Unit Keyless Central Locking Electric Windows Cup Holders (2)	
Storage	Dual Overhead Storage Pockets In-Dash Centre Document Storage Door Storage Pockets Dash Storage Tray (1 DIN) Coat Hooks	
Cab: External	Front End-Outline Marker Lamps Door Side Impact Beams	
Chassis	Reverse Warning Buzzer Factory Reverse Camera with Infrared Display and Audible Pickup	

Cab Features	
Туре	All Steel Forward Control Manual Tilt
Cab Structure	ECE-R29 European Cab Strength Approved
Mounting	Hydroelastic 4 Point
Additional Engine Access	Removable Engine Access Panel
Colour	Natural White
Windscreen Wipers	2 Speed + Intermittent Cycle with Integrated Washer Nozzles
Rear Vision Mirrors	2 x External Convex (ECE 46) - Heated
Seating Capacity	3
Seat Belts	Lap Sash Belts for Outside Seating Positions Lap Belt for Centre Seat
Seat (driver)	Suspended with Weight Adjustment, LH Arm Rest and Lumbar Support
Seats (passenger)	Flat Folding, 2 Passenger Bench

Service Intervals	
Interval*	30,000km or 12 Months (whichever occurs first)
Notes	* based on normal operating conditions and may be reduced when operating under severe conditions.

Warranty	
Basic/Powertrain	5 Years or 200,000kms (whichever occurs first)
Cab Perforation/Anti Corrosion	5 Years
Body	1 Year/Unlimited kms

Performance	
Turning Circle (kerb to kerb - metres)	11.0
Road Speed (km/h) at Max Engine Speed	137
Engine Speed (rpm) at 100km/hr (top gear)	2346
Gradeability at Rated GVM (theoretical)*	45%
Notes	*This is theoretical performance only. Actual performance may vary under different conditions
(theoretical)* Notes	

Specifications

MODEL

- 4x2 515 Built Ready Wide Cab FRP Pan MWB 6 Sp. Duonic DCT (FEB21ER3SFBC-B03) 4x2 515 Built Ready Wide Cab Honeycomb Pan MWB 6 Sp. Duonic DCT
- В
- 4x2 515 Built Ready Wide Cab FRP Pan MWB 6 Sp. Duonic DCT (FEB21ER3SFBC-B3B)

BASE 3400mm 3400mm 3400mm

WHEEL

GVM (optional) 4,495kg

(optional) 7,995kg

GCM

4,495kg 7,995kg 4,495kg 7,995kg

Mass (estimated)*		
Front*	A C 1585kg	B TBA
Rear*	A C 1885kg	B TBA
Total*	A C 3470kg	B TBA
Notes	* Mass (est.) includes oil and water but excludes spare wheel, tools & fuel. Weights provided are subject to 3.5% variation (+/-)	


Dimensions (mm)	
WFF (Width Front Fender) (mm)	1995
WRA (Width Rear Axle) (mm)	1929
WRT (Width Rear Track) (mm)	1495
Width Frame (mm)	748

Body Builder's Notes

Built Ready		
Length (mm)	A B 4320	C 4350
Width (mm)	A B 2185	C 2200
Height (mm)	A B 2135	C 2200
Overall Unit Length (mm)	A B 6335	C 6375
Features	A C • 20mm White FRP Side and Wall Panels • One Piece Aluminum Roof Sheet • External Stainless Polished Extrusions • 3mm Steel Chequerplate Floor (Exposed Chequer Up) • 190mm High Internal Kick Panels • Internal Light with in cab switch • Internal Square Tube Tie Rails fixed to Panel Walls • Double Rear Doors with Three Hinges (kerl side opens first) • Fixed Grab Handles on Rear Pillars • Rear under-run bar to suit tailgate with steps and light protection frames • Tailgate: 600kg Capacity Dhollandia Tuckaway Tailgate	One Piece Aluminum Roof Sheet External Stainless Polished Extrusions The amount of th





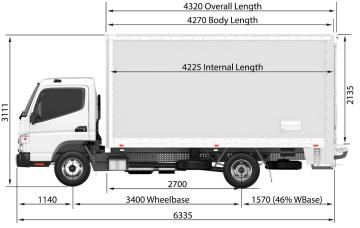



Call 1800 033 557

or visit fuso.com.au

Unless specified in writing herein the accessories, applications, bodies or equipment depicted in this document are for illustration purposes only and may not be available from Daimler Truck and Bus Australia Pacific Pty Ltd. (ABN 86 618 413 282) (DTB). No representation or warranty whatsoever is given in relation to any accessories, applications, bodies or equipment or suitability of same that are shown herein that may be manufactured, supplied or fitted by a party other than DTB. DTB reserves the right without notice or obligation to discontinue or make changes to the colour, designs, materials and specifications of the products and options referred to herein at any time. For the most current information and in order to ascertain which accessories, applications, bodies and equipment are available from DTB please contact your authorised FUSO Truck and Bus dealer. Fuso is a registered trademark of Daimler Truck and Bus Australia Pacific Pty Ltd. Copyright DTB. Reproduction in whole or part prohibited without written approval. Part Number TSX30A-SSV4. Valid from 17-Jul-19.