





Parchem...

ABOUT US

Parchem Construction Supplies is a manufacturer and distributor of industry leading brands servicing, the concrete and construction industries.

CONSTRUCTION PRODUCTS

Parchem's range of construction products include concrete repair, grouts and anchoring systems, engineering and architectural coatings, concrete curing compounds, flooring and surface treatments, jointing systems, sealants, waterproofing materials and water stops. With trusted brands such as Emer-Clad, Durafloor, Fosroc, Vandex, Corkjoint and Index, Parchem has a solution for all civil engineering, commercial and industrial projects.

CONSTRUCTION EQUIPMENT & TOOLS

Parchem offers the most complete range of concrete finishing, surface preparation, concrete vibrators, flexshaft pumps and compaction equipment in the market. Specialising in light construction equipment, the innovative design and technical expertise make the brands in this range the leading choice for the professional contractor. With industry leading brands such as Flextool, Mikasa, Blastrac, Allen and ProFinish the quality engineered products are performance driven and backed by an experienced team of personnel committed to service.

DECORATIVE CONCRETE SOLUTIONS

Our decorative concrete solutions are ideal when you are renovating or building your dream home. The comprehensive range of decorative concrete products includes stamped impression concrete, stencil concrete, concrete colours and resurfacing products and internal flooring solutions which will compliment any style or design allowing you to create the look you want. With industry leading brands such as DT, Cobblestone, Colour Thru and Mastershield, there is a range of colours and products to suit any internal or external decorative concrete solution.



PLEASE RECYCLE

© Copyright 2013 Parchem Construction Supplies Pty Limited
This publication is copyright. All rights are reserved.

Reproduction in whole or in part is prohibited without written permission.
Application details are provided as a suggestion only of intended use.

This catalogue is produced as a guide to the product range. Some items may not be available at all outlets.
Owing to a continual product improvement, designs & specifications may be subject to change without notice.



Manufacturer and distributor of industry leading brands

The complete range of products and solutions for the hire industry...

CONTENTS

Concrete Vibrators	4-7
Concrete Power Screeding	8-13
Concrete Power Finishing	14-17
Finishing Blades	18
Concrete Hand Tools	19-21
Surface Scarifiers	22
Grinding Shoes	23
Brick Saws	23
Floor & Road Saws	24
Premium Blades	25-26
Cup Wheels	27
Soil Compaction	28-29
Drive Units	30-31
Pumps	30-33
Power Hammer Tools	34-35
Coatings	36
Waterproofing	36-38
Industrial Flooring	38-40
Sealants	41
Jointing Systems	42-45
Stencil Patterns	46-47
Stamped Impression Concrete	48-49
Decorative Concrete Products	50
Concrete Sealers	51
Internal Flooring	52

CONCRETE VIBRATORS



PORTAVIBE

APPLICATION

For vibratings slabs, footings, stairways and footpaths.

PORTABLE POWER

The PortaVibe provides the solution to vibrating concrete with an easy to use portable unit. There is no need for electricity supply or separate drive units. The Honda four-stroke motor provides hassle free operation and in comparison to a two-stroke motor uses less fuel, has reduced engine emissions and no need for mixed fuel.

LIGHTWEIGHT


The unit is light and balanced and is fitted with an adjustable handle and carry strap for user comfort and complete control.

EASY TO USE

A convenient on/off switch and throttle control built into the handle.

QUALITY MANUFACTURE

Flextool vibrators are manufactured in Australia. The name you can trust.

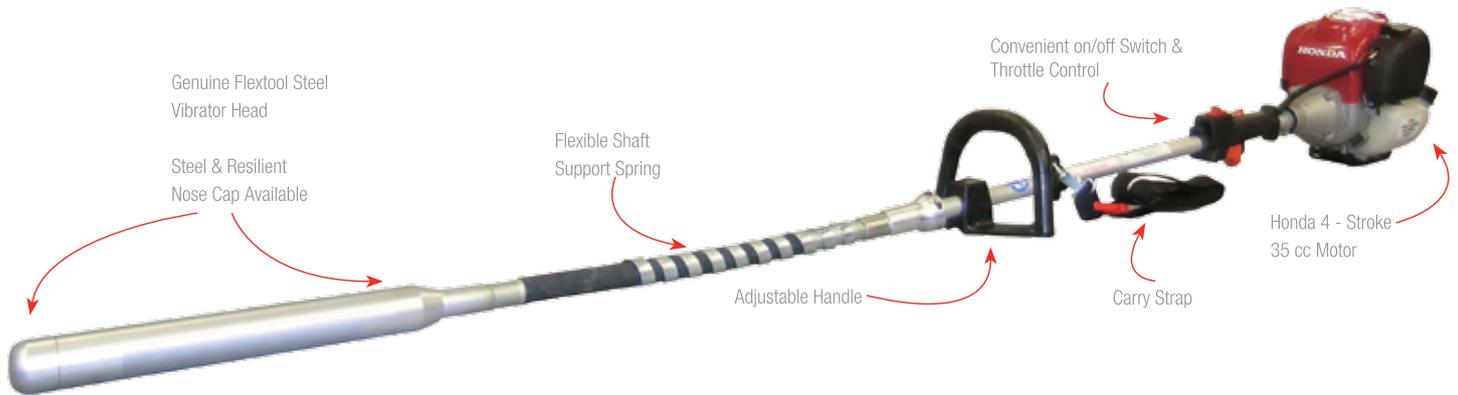

MODEL	PVE44	
Product Code	F03330EX	
Type	Hard Nose	
Flexshaft Length	mm	545
Vibrator Head Dia	mm	44
Vibrator Head Length	mm	390
Operating Weight	kg	13
Shaft Inner Core Dia	mm	7.5
Shaft Outer Casing Dia	mm	28
Frequency	vib/min	9,000
Amplitude in Air	mm	2.8
Engine Make	Honda	
Engine Model	GX35	
Max Rated Power	Hp	1.5
Fuel Type	Petrol	



Optional PortaPump Attachment Kit F03660



CONCRETE VIBRATORS

FLEXTOOL HEAVY DUTY CONCRETE VIBRATORS

The Flextool VP Series of Immersion Concrete Vibrators produce high frequency vibration allowing for the efficient compaction of low slump concrete mixes. Compaction improves the strength and finish of the concrete by driving out entrapped air. The epicyclic design of the VP series vibrator range generates high frequency vibration from a low flexshaft speed, the low speed of both the flexshaft and vibrator rotor results in longer service life. The rotor generating the vibration is supported by a heavy duty self aligning bearing and executes a pendulum motion. Vibration is greatest at the tip of the vibrator head.



HEAVY DUTY IMMERSION CONCRETE VIBRATORS VP - HARD NOSE CAP

MODEL		VP38	VP44	VP57
Product Code		F01732EX	F01762EX	F01750EX
Flexshaft Length	m	6	6	6
Vibrator Head Dia	mm	38	44	57
Vibrator Head Length	mm	480	470	450
Operating Weight	kg	21	22	24
Shaft Inner Core Dia	mm	13	13	13
Shaft Outer Casing Dia	mm	32	32	32
Frequency	vib/min	11,000	11,000	11,000
Amplitude in Air	mm	1.7	1.8	2.1



MODEL		VP42EX	VP48EX	VP60EX
Product Code		F01745EX	F01755EX	F01775EX
Flexshaft Length	m	6	6	6
Vibrator Head Dia	mm	42	48	60
Operating Weight	kg	22	23	25
Shaft Inner Core Dia	mm	13	13	13
Shaft Outer Casing Dia	mm	32	32	32
Frequency	vib/min	13,000	13,000	13,000
Amplitude in Air	mm	1.8	1.9	2.1

FLEXTOOL PNEUMATIC IMMERSION VIBRATORS

These pneumatic immersion vibrators are constructed from high quality hardened ground steel and are engineered to withstand the harshest treatments. They are built to work, day after day and have been constructed to provide high frequency and high centrifugal force to ensure maximum efficiency. Available in six different sizes and with the ability to adjust vibration with the twist action shaft, there is a model for every application.



MODEL		VL25	VL35	VL45	VL55	VL75	VL87
Product Code		PV-AV25	PV-AV35	PV-AV45	PV-AV55	PV-AV75	PV-AV87
Hose Length	m	2	2	2	2	2	2
Vibrator Head Dia	mm	25	35	45	55	75	87
Vibrator Head Length	mm	254	270	321	353	398	415
Operating Weight	kg	4.5	5.5	6.1	8.2	12.3	13.5
Frequency	vib/min	21,000	18,000	18,000	17,500	16,000	14,000
Air Consumption	CFM (L/Min)	12.7 (360)	15.9 (450)	22.6 (640)	30.0 (850)	42.4 (1200)	49.4 (1400)
Force	kN	0.60	1.66	3.20	6.60	14.01	17.75

PNEUMATIC EXTERNAL VIBRATORS

The rugged design of QR & FB Series external vibrators with only two moving parts means these units are built to perform and outlast the competition. They are suitable for use on shutters, tampers, surface finishes, hoppers, tables and many other applications where high frequency vibration is required. Vibration frequency is adjustable by altering the air flow to the vibrator.

OPTIONS

- FB Series - Fixed Bracket Type
- QR Series - Quick Release Type



MODEL		750	1200	1600	2000	3500	6000
Product Code	QR Type	PV-QR750	PV-QR1200	PV-QR1600	PV-QR2000	PV-QR3500	PV-QR6000
Product Code	FB Type	PV-FB750	PV-FB1200	PV-FB1600	PV-FB2000	PV-FB3500	PV-FB6000
Operating Weight	kg	8.6	9.1	9.1	14.5	15.2	15.5
Frequency	vib/min	13,000	15,000	16,000	16,000	15,200	14,500
Air Consumption	L/Sec	19	19	19	24	27	31
Amplitude	mm	1.19	1.59	1.60	1.80	1.98	3.18
Centrifugal Force	kN	7.34	11.74	15.5	19.57	36.25	57.82
Quick Release Bracket	Model	PV-QRB2	PV-QRB2	PV-QRB2	PV-QRB4	PV-QRB4	PV-QRB4

CONCRETE POWER SCREEDING

FLAT FLOOR TOOLS

These extruded magnesium flat floor tools are specifically designed to improve floor or pavement flatness. Each tool comes standard with three 1.8 m clip-together aluminum handles, stabilising outriggers and equalizer pitch adjusting head for precise, even control.

BUMP CUTTER

Cuts down bumps and fills low areas after concrete slab has been floated.


CHECK ROD

Reduces bumps and fills low areas while the concrete is still plastic.

CHANNEL FLOAT

Use in place of traditional bull floats for flatter floors.

		BUMP CUTTER	CHECK ROD	CHANNEL FLOAT
Product Code		FR-3000BC	FR-3000CR	FR-3000CF
Operating Weight	kg	12	14	17
Extrusion Length	m (ft)	3.1 (10')	3.1 (10')	3.1 (10')
Dimensions (w x h)	mm (in)	51 x 102 (2' x 4')	102 x 51 (4' x 2')	152 x 51 (6' x 2')

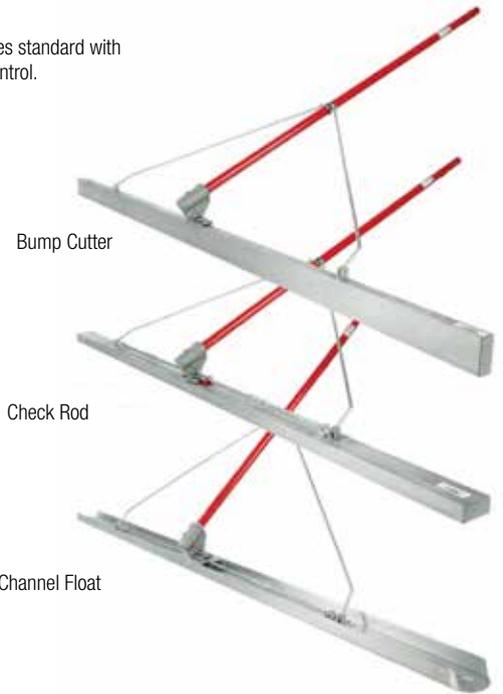

PORTASCREED

The PortaScreed has been engineered to deliver high frequency vibration across the entire blade length. This allows the operator to accurately screed the concrete surface in 75% less time than traditional screeding methods. The PortaScreed is also equipped with four independent handle vibration isolators and a fully adjustable twin handle system maximising operator comfort and screed control.

FEATURES

- Unique extruded blade simultaneously cuts and smooths the concrete
- Four independent handle vibration isolators minimise handle vibration
- Blades are easily able to be changed in approximately two minutes
- Fully adjustable twin handle system for total levelling control
- Tilt up stand keeps the engine out of the concrete and off the ground when not in use
- Rounded blade ends for easy negotiation of obstacles
- Emergency engine shut off switch
- Blades available in seven different sizes

MODEL	PS35
Product Code	F03500
Weight	Kg 12.7
Engine Make	Honda
Engine Model	GX35
Max Rated Power	Hp 1.5
Fuel Type	Petrol



Note: Parchem does not recommend using the PortaScreed to compact concrete. Please enquire about the Flextool immersion vibrator range to ensure sufficient concrete vibration is achieved.

EXTRUSIONS

PRODUCT CODE	LENGTH	WEIGHT (KG)
F03502	1220mm (4')	2.9
F03503	1830mm (6')	4.4
F03504	2440mm (8')	5.8
F03505	3050mm (10')	7.3
F03506	3660mm (12')	8.7
F03507	4270mm (14')	10.2
F03508	4880mm (16')	11.6



Blades can be easily changed in approximately two minutes.

FLEXTOOL DOUBLE BEAM SCREED

APPLICATION

- Roadways
- Airport aprons
- Slipways
- Spillways
- Tilt panels
- Warehouse floors

OPTIONS

- Special lengths and separate beam assemblies are available to order. (Non standard orders must be accompanied by a deposit.)

FEATURES

- Vibrating screeds are an effective means of compacting large areas of concrete.
- The vibratory motion of the beams imparts a self propelling motion to the screed.
- Contractors can save labour and increase placement rates as a vibrating screed strikes and compacts concrete in one pass.
- Pre-tensioned beams allow the surface flatness to be controlled by adjusting beam pretension & are recommended for precision finishing.
- For spans up to 8.2 metres.
- Lifting handles are fitted at the ends of the beams. Pull ropes & handles are provided for directional control.
- Two lifting eyes are fitted to the screed to facilitate site handling.
- The reliability of the machine has been well proven over many years. The powerful vibrator will give long maintenance free life due to its sealed design, heavy duty bearings and oil bath lubrication.



PETROL MODEL		DBS41	DBS65PT	DBS82PT
Product Code		F09970	F09575	F09576
Length	m	4.1	6.5	8.2
Operating Weight	kg	82	117	131
Frequency	vib/min	4500	4500	4500
Pretensioned Beam		No	Yes	Yes
Engine Make		Honda	Honda	Honda
Engine Model		GX160	GX160	GX160
Max Rated Power	Hp	5.5	5.5	5.5
Fuel Type		Petrol	Petrol	Petrol

DIESEL MODEL		DBS41	DBS65PT	DBS82PT
Product Code		F03295	F02499	F02623
Length	m	4.1	6.5	8.2
Operating Weight	kg	95	130	144
Frequency	vib/min	4500	4500	4500
Pretensioned Beam		No	Yes	Yes
Engine Make		Yanmar	Yanmar	Yanmar
Engine Model		L48	L48	L48
Max Rated Power	Hp	4.7	4.7	4.7
Fuel Type		Diesel	Diesel	Diesel

ELECTRIC MODEL		DBS41	DBS65PT	DBS82PT
Product Code		F01410	F01514	F01520
Length	m	4.1	6.5	8.2
Operating Weight	kg	84	119	133
Frequency	vib/min	4275	4275	4275
Pretensioned Beam		No	Yes	Yes

PNEUMATIC MODEL		DBS41	DBS65PT	DBS82PT
Product Code		F01771	F01772	F01774
Length	m	4.1	6.5	8.2
Operating Weight	kg	78	113	127
Frequency	vib/min	16000	16000	16000
Pretensioned Beam		No	Yes	Yes

CONCRETE POWER SCREEDING

ALLEN 12HED STEEL TRUSS SCREED



FEATURES

- Frame construction - steel
- Vibration system - eccentric shaft
- Maximum width - 19.8 metres (65 ft)
- Lowest slump concrete - 75mm (3')
- Max depth concrete - 200mm (8')
- Blades - 10 guage galvanised steel



Manual Winch Kit



Bridge Deck End Bracket & Roller Assy



Quick Disconnect System

PRODUCT CODE	DESCRIPTION	WEIGHT
AEC-027879	Engine Kit 1 - Honda GX270 - 9Hp - use with screeds 3.1m to 15.2m	52
AEC-028327	Engine Kit 2 - Honda GX340 - 11Hp - use with screeds 10.6m to 19.8m	54
AEC-025894	End Handle Group	16
AEC-018993	Manual Winch Kit	18
AEC-028363	Hydraulic Power Winch Kit	113
AEC-506000	Bridge Deck System - End Bracket	72
AEC-022977	Bridge Deck System - Roller Assy	30
AEC-046708	Invert / Crown Bracket (adds 30cm to length of screed)	28
AEC-020230	U-Joint Kit (requires some modification to screed)	10

12HED STEEL TRUSS SECTIONS		1.5M (5FT)	2.3M (7.5FT)	3.1M (10FT)
Product Code		AEC-022379	AEC-022378	AEC-028379
Weight	Kg	41	61	82

ALLEN 12ECS ALUMINIUM TRUSS SCREED

FEATURES

- Frame construction - aluminium
- Vibration system - eccentric shaft
- Maximum width - 15.2 metres (50 ft)
- Lowest slump concrete - 100mm (4')
- Max depth concrete - 150mm (6')
- Blades - 12 guage galvanised steel



PRODUCT CODE	DESCRIPTION	WEIGHT
AEC-020272	Engine Kit - Honda 9Hp - use with screeds 3.1m to 15.2m	46
AEC-025474	End Handle Group	15
AEC-018993	Manual Winch Kit	18

ALLEN 12ECS ALUMINIUM TRUSS SECTIONS	.76M ((2FT)	1.5M (5FT)	2.3M (7.5FT)
Product Code	AEC-028367	AEC-018718	AEC-017290
Weight Kg	15	27	41

ALLEN 12HD STEEL TRUSS SCREED

FEATURES

- Frame construction - steel
- Vibration system - dual air
- Maximum width - 19.8 metres (65 ft)
- Lowest slump concrete - 50mm (2')
- Max depth concrete - 305mm (12')
- Blades - 10 guage galvanised steel



PRODUCT CODE	DESCRIPTION	WEIGHT
AEC-020222	End Handle Group (inc air fittings and regulator)	12
AEC-018993	Manual Winch Kit	18

12HD STEEL TRUSS SECTIONS	1.5M (5FT)	3.1M (10FT)
Product Code	AEC-018531	AEC-028352
Weight Kg	42	82

CONCRETE POWER SCREEDING



BOOM EXTENSION - WIRELESS REMOTE CONTROLLED

The ScreedSaver II™ brings you the best of all worlds. It's compact, yet so very powerful. It has independent front wheel drive resulting in zero turn capability. This is the World's first wireless remote controlled laser levelling screed machine.

FEATURES

- Automatic Laser Levelling
- Labor eliminating Auger head measuring 10' (3.1m)
- Boom extension of 12-1/2 feet (3.8m)
- > 4,000sq. ft/hour (372m²) screed rates
- Screed accuracy (F_r/F_l) is equal to or better than any screeding machine in the world



BOOM EXTENSION - WIRELESS REMOTE CONTROLLED

The ScreedSaver Max™ takes screeding to a new level. This larger Boom extension screed integrates the technologies of the standard ScreedSaver II with the added features of front wheel drive and rear wheel steering, a 180° pivoting drive frame, and a 35hp Diesel motor.



FEATURES

- Wireless remote controlled screed
- Labor eliminating Auger head 12.5" (3.8m)
- Boom extension of 16' (4.9m)
- > 8,000 sq. ft/hour (743m²) screed rates
- Screed accuracy (F_r/F_i) is equal to or better than any screeding machine in the world



CONCRETE POWER FINISHING

FLEXTOOL WALK-BEHIND POWER TROWELS

FEATURES

- Improved heavy duty gearbox design for longer life
- Height adjustable handles for operator comfort and ease of control
- Centrifugal runaway safety switch for operator safety
- Fingertip blade tilt control mechanism
- Central lifting hook for easy and safe onsite handling




Trolley



MODEL		FT34	FT40
Product Code		F03434	F04040
Operating Weight	kg	75	80
Trowel Diameter	mm (in)	865 (34)	1015 (40)
Number of Blades		4	4
Speed Range	RPM	40-125	40-125
Blade Pitch Max	Deg	28	28
Engine Make		Honda	Honda
Engine Model		GX160	GX160
Max Rated Power	Hp	5.5	5.5
Fuel Type		Petrol	Petrol

BLADES & ACCESSORIES		FT34	FT40
Finishing Blades		FT-D34-3	FT-D40-2
Combination Blades		FT-S34-18	FT-S40-18
Trolley		F03480	N/A

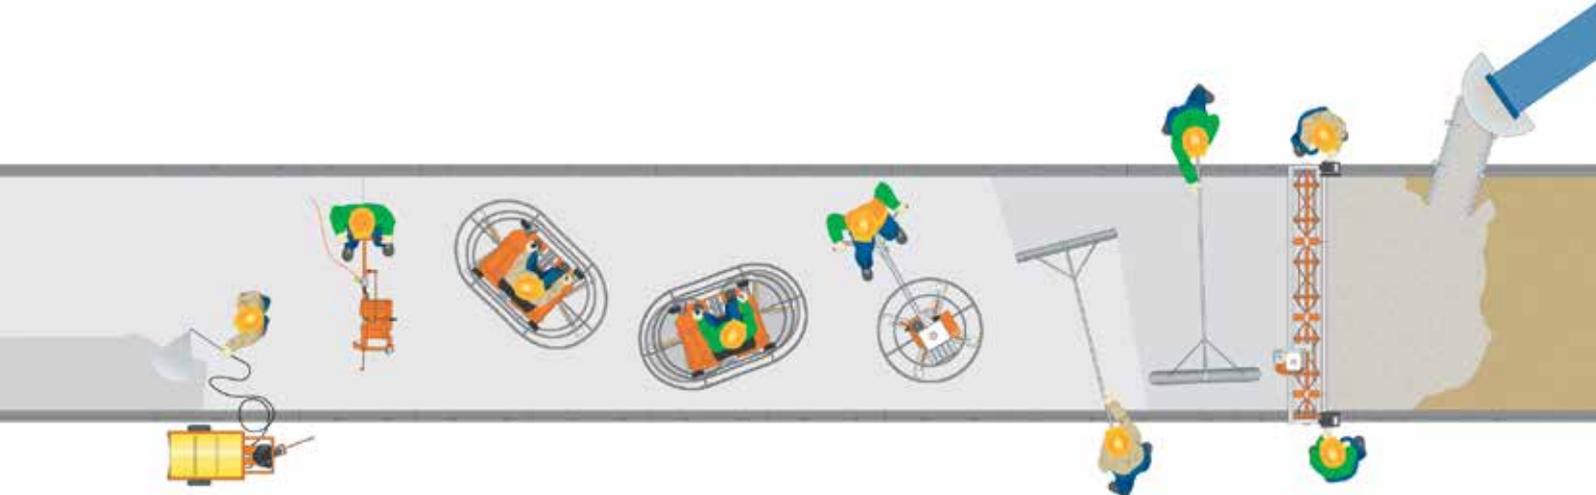

PROFINISH WALK-BEHIND POWER TROWELS

ProFinish trowel machines are available in operating widths ranging from 24" to 46" with one diesel and four petrol models. With cast iron spiders, lift levers and pressure plates these precision engineered components ensure the best possible flat floor results are achieved on each and every slab. Fitted with highly efficient gearboxes, maximum torque is transferred to the trowel rotors for superior performance at low, medium and high rpm.

FEATURES

- Heavy duty gearboxes designed for the toughest panning, floating and finishing applications
- Easy access to all three handle mounted operating controls provides greater user safety
- Fatigue reducing body contoured, padded handle bar provides operator comfort
- Central lifting hook for easy and safe onsite handling



FP424

FP436

FP436D

FP440

FP446
*includes D-Handle

MODEL		FP424	FP436	FP436D	FP440	FP446
Product Code		F03424	F03436	F03436D	F03440	F03446
Operating Weight	kg	50	75	89	85	105
Trowel Diameter	mm (in)	610 (24)	915 (36)	915 (36)	1015 (40)	1165 (46)
Number of Blades		4	4	4	4	4
Speed Range	RPM	40-130	40-130	50-130	40-130	40-150
Blade Pitch Max	Deg	30	30	30	30	30
Engine Make		Honda	Honda	Yanmar	Honda	Honda
Engine Model		GX160	GX160	L48	GX270	GX390
Max Rated Power	Hp	5.5	5.5	4.7	9	13
Fuel Type		Petrol	Petrol	Diesel	Petrol	Petrol

BLADES & PANS		FP424	FP436	FP436D	FP440	FP446
Finishing Blades		BR-20455	BR-20414	BR-20414	BR-20414	BR-20410 or BR-WH8X18
Combination Blades		-	BR-20479	BR-20479	BR-20479	BR-20480
Pan Float		BR-11766	BR-11691	BR-11691	BR-B440PAN	-



D Handle

MODEL	FP436-440	FP446
Product Code	F03552	F03553

CONCRETE POWER FINISHING



PROFINISH RIDE-ON POWER TROWELS

The ProFinish series of Ride-On Power Trowels offers exceptional power to weight ratios, meaning they are the ultimate force in tackling concrete pours of all sizes. Powerful engines deliver maximum performance to the heavy-duty gearboxes resulting in a perfect finish every time.

HEAVY DUTY GEARBOX

ProFinish ride on power trowels are fitted with heavy-duty gearboxes that provide longer life and less maintenance.

FEATURES

- Heavy duty gearboxes provide longer life and less maintenance
- Twin stick, multi-directional levers deliver immediate, responsive steering
- Emergency shut down control for operator safety
- Lifting points for balanced lifting on and off the job site
- Independent manual pitch control
- Adjustable seat for operator comfort
- Lights for indoor and night time work
- Water / Retardant discharge system
- Wheel kit for easy onsite manoeuvrability



FP836



FP846

MODEL		FP836	FP846
Product Code		F03836	F03846
Operating Weight	kg	330	480
Dimensions (l x w x h)	mm	1940 x 990 x 1040	2540 x 1270 x 1360
Trowel Diameter	mm (in)	915 (36)	1165 (46)
Number of Blades		8	8
Speed Range	RPM	50-140	50-140
Blade Pitch Max	Deg	30	30
Water Tank Capacity	L	14	14
Engine Make		Honda	Vanguard
Engine Model		GX690	613400
Max Rated Power	Hp	27	35
Fuel Type		Petrol	Petrol
Fuel Tank Capacity	L	14	14

BLADES & PANS		FP836	FP846
Finishing Blades		BR-20414	BR-20410 or BR-WH8X18
Combination Blades		BR-20479	BR-20480
Pan Float		BR-11691	BR-11692

FINISHING BLADES

FINISHING BLADES

Finishing blades are designed to produce a smooth and polished finish to the concrete surface. After the slab has firmed up, blade pitch is increased to a greater angle resulting in a smooth and polished finish.



MODEL		BR-20455	BR-20414	BR-20410	BR-WH8X18-5	FT-D34-3	FT-D40-2
Size	mm	120 x 230	152 x 355	152 x 460	210 x 460	150 x 325	150 x 375
Size	in	4.75" x 9"	6" x 14"	6" x 18"	8" x 18" (5pk)	6" x 12.75"	6" x 14.75"
Weight	kg	2.20	4.80	6.20	12.75	5.20	6.00
To Suit		FP424	FP436 / FP836 FP440	FP446 / FP846	FP446 / FP846	FT34	FT40

COMBINATION BLADES

Combination blades are designed for operators who wish to use one blade for both floating and finishing applications. During the initial stages of power trowelling the blade is set flat and is used for floating, as the slab firms up the blade pitch is increased to produce a smooth finish.



MODEL		BR-20479	BR-20479P	BR-20480	FT-10-66	FT-S34-18	FT-S40-18
Size	mm	205 x 355	200 x 360	205 x 455	185 x 322	185 x 322	195 x 370
Size	in	8" x 14"	8" x 14"	8" x 18"	7.25" x 12.50"	7.25" x 12.50"	7.75" x 14.50"
Weight	kg	6.00	4.90	8.00	4.50	7.20	8.50
To Suit		FP436 / FP836 FP440	FP436 FP440	FP446 / FP846	FT34	FT34	FT40

FLOAT BLADES

Float blades are designed to clip onto finishing blades. Float blades are used in the flat position, breaking down high spots whilst working aggregate down and bringing mortar to the surface.



MODEL		BR-20415	BR-20411
Size	mm	250 x 355	250 x 455
Size	in	10" x 14"	10" x 18"
Weight	kg	10.00	12.80
To Suit		FP436 / FP440	FP446 / FP846

PAN FLOATS

Pan floats clip onto both finishing or combination blades. Pan floats with their large surface area achieve flatter floors than traditional float blades as they are more efficient in removing imperfections, bumps and voids.



MODEL		BR-11766	BR-11691	BR-900P	BR-440PAN	BR-11414	BR-11692	BR-WH3505	BR-WH3505FLAT
Size	mm	605	940	920	1050	1175	1230	1175	1175
Size	in	24"	37"	36.25"	41.25"	46.25"	48.5"	46.25"	46.25"
Weight	kg	5.00	17.60	16.00	23.30	26.30	29.40	30.00	20.00
Type		4 - Blade	4 - Blade	4 - Blade	4 - Blade	4 - Blade	4 - Blade	5 - Blade	5 - Blade
Connection Type		Clip	Clip	Clip	Clip	Clip	Clip	Safety Pin	Safety Pin
To Suit		FP424	FP436 / FP836	MP225 - Edger	FP440	TS96 / LP95	FP846	Whiteman / Allen	Whiteman / Allen

POINTED TROWEL



PART NO.	BLADE DIMENSION (MM)	BLADE GAUGE	PACK QTY
FP1001	120 x 365	Light	6
FP1009	100 x 355	Light	6
FP1091	115 x 405	Light	6
FP1092	115 x 450	Light	6
FP1093	115 x 500	Light	6

SQUARE TROWEL



PART NO.	BLADE DIMENSION (MM)	BLADE GAUGE	PACK QTY
FP1002	280 x 120	Light	6

VEE JOINTER - STAINLESS STEEL



PART NO.	WIDTH (MM)	DEPTH (MM)	PACK QTY
FP3001S	75	10	6
FP3002S	150	12	6
FP3012S	150	20	6

MAGNESIUM FLOATS



PART NO.	BLADE DIMENSION (MM)	END CORNERS	PACK QTY
FP2051R	79 x 408	Round	6
FP2051	79 x 406	Square	6
FP2052	79 x 508	Square	6

STEEL FLOAT - STAINLESS STEEL



PART NO.	BLADE DIMENSION (MM)	PACK QTY
FP2019S	150 x 380	6
FP2009S	160 x 210	6
FP2029S	290 x 100	6

EDGERS - STAINLESS STEEL



PART NO.	RADIUS (MM)	WIDTH (MM)	LENGTH (MM)	DEPTH (MM)	PACK QTY
FP4001S	5	75	140	12	6
FP4002S	6	75	140	12	6
FP4003S	10	75	140	19	6
FP4006S	6	100	150	14	6
FP4008S	19	75	140	19	6
Large (Kerb & Gutter)					
FP7001S	25	150	230	24	6
FP7002S	12	112	175	22	6
FP7003S	25	112	175	19	6
FP7006S	10	105	150	14	6
FP7008S	20	140	200	19	6

WOOD FLOATS



PART NO.	BLADE DIMENSION (MM)	PACK QTY
FP8001	112 x 300	6
FP8002	112 x 380	6
FP8024	65 x 600	6

ADHESIVE SPREADERS



PART NO.	DESCRIPTION	PACK QTY
FP1QTF	6 mm Saw tooth	6
FP1QTF2	10 mm Square tooth	6

STEEL MARBLE SHEEN TROWELS



PART NO.	LENGTH (MM)	PACK QTY
FP1021	350	6
FP1022	450	6

CONCRETE HAND TOOLS

45 DEGREE BEVEL EDGER - STAINLESS STEEL



FP4013S

PART NO.	DESCRIPTION	PACK QTY
FP4013S	45 degree 100 mm wide 25 mm bevel	6

CAST TOOLS



FP11A

PART NO.	DESCRIPTION	PACK QTY
FP11A	Jointer Cast Tools 150 x 75 mm D10	6
FP13B	Jointer Cast Tools 150 x 75 mm D12	6
FP18E	Cast Groover Tools 200 x 75 mm Depth 25 mm	6
FP19G	Cast Tool - Non Slip Groover	6

GAUGING TROWEL



PART NO.	BLADE DIMENSION (MM)	PACK QTY
MH-MP144	175MM SOFT GRIP	6
MH-MP244	200MM SOFT GRIP	6

VARIABLE POSITION LEVEL VIAL HANDLE SCREED



PART NO.	LENGTH (MM)	PACK QTY
FS0012	1200	3
FS0015	1500	3
FS0018	1800	3
FS0021	2100	3
FS0024	2400	3
FS0027	2700	3
FS0030	3000	3
FS0036	3600	3
FS0042	4200	3
FS0045	4500	3
FS0048	4800	3

Clamp on style handle which may be reversed to the working face for second use. Fitted with vial level and end plugs as well as powder coated for easy clean up.

NB. Sizes of 4200-4800mm may not be sufficiently rigid for close tolerance work.

WALKING TROWEL



555

PART NO.	LENGTH (MM)	FEATURES	PACK QTY
FW-555	600	Round ends	6
Stainless Steel			
FW-557	600	Round ends	6

*Suitable for Clip Together or Telescopic Handles.

FRESNO TROWEL



607

PART NO.	LENGTH (MM)	FEATURES	PACK QTY
FF-607	600	Tilt mechanism bracket fitted	6
FF-609	900	Tilt mechanism bracket fitted	6

*Suitable for Clip Together or Telescopic Handles.


WALKING STEEL FLOAT - STAINLESS STEEL



PART NO.	DIMENSIONS	PACK QTY
FP2009SW	160 x 210mm	6
FP2019SW	150 x 380mm	6

*Suitable for Clip Together or Telescopic Handles.

ALUMINIUM BULLFLOAT



PART NO.	LENGTH (MM)
FB0600	600
FB0900	900
FB1200	1200
FB1500	1500

*Suitable for Clip Together or Telescopic Handles.

TELESCOPIC HANDLE



PART NO.	LENGTH (M)	FEATURES
FH0076	2.75 - 5	Lock nut handle length adjustment
FP10076E		Removable adaptor tube

CLIP TOGETHER HANDLE



PART NO.	LENGTH (M)	FEATURES
FH0588	2	Clip together handle

NITOFLO SICALTOP SPREADER



PART ID	DESCRIPTION
BM-TV-830	SICALTOP COLOUR SPREADER

SHOVELS



PART NO.	DESCRIPTION	PACK QTY
MH-GT75	Steel Shovel - Square Mouth	6
ARW023	Fibreglass Handle Post	6

KNEEL BOARD



PART NO.	PACK QTY
FP110209	6

CONCRETE RAKES



PART NO.	DESCRIPTION	PACK QTY
CC010-1	Notched blade	2
ARW-123-1	Straight blade	2
MH-CPR500	500MM - ALL ALLOY - 1.2KG	2
MH-CPRBIGRED	500MM - WITH 1.8M LONG HANDLE	2

HAMMERS - FIBREGLASS HANDLE



PART NO.	DESCRIPTION
ARW033	Short F/B Handle 4lb
ARW034	Long F/B Handle 4lb

CAULKING GUN



PART NO.	DESCRIPTION
ARW055	Caulking Gun - 380mm

BOLT CUTTERS



PART NO.	LENGTH (MM)
ARW094	750
ARW095	900

SURFACE SCARIFIERS

SURFACE SCARIFIERS

FEATURES

- **Versatility** - Surface grinder/scarifier with a cutting width of 200 mm (8"), ideal for concrete or asphalt surfaces. A variety of multipurpose, interchangeable tools makes surface cleaning easy, virtually eliminating down time for changing tools.
- **Handling** - The machine combines lightweight with compact size & high performance.
- **Economical** - The machine gives unsurpassed value & return on your investment in time & equipment.
- **Adjustable** - The fine pitch tool height adjustment makes the machine responsive to your needs & extends tool life.
- **Expandable** - An optional edger cage can be fitted allowing you to work within 12 mm from any wall or protrusion. A dust control outlet is fitted to allow use with an optional dust extractor.



SP-8H



SP-8E

* Petrol SPS units come with a factory installed Cyclopac air filtration system.

MODEL	PETROL		ELECTRIC
Model	SP-8	SP-8	SP-8E
Part No.	BR-SP8R	BR-SP8H	BR-SP8H
Path	200 mm (8")	200 mm (8")	200 mm (8")
Engine	Robin 6.0 hp	Honda 5.5 hp	240V 1.5kW, 8.7amp
Weight	61 kg	61 kg	68 kg

CUTTER CAGES



PART CODE	DESCRIPTION
BR-R139	Assembly Milling of misangled footpath, scabbling of concrete surfaces and milling concrete joints.

SURFACE SCARIFIER ACCESSORIES



'A' Type Cage



'B' Type Cage


PART CODE	DESCRIPTION
BR-50078	Flail Cage Assembly - "A" Type
BR-50146	Friction Cage Assembly - "B" Type
BR-50017	Cutter Shaft
BR-50102	Ring Spacer
BR-50339	Hardened Washer
BR-50127	Tension Spring
BR-50147	Shackles
BR-50021	B-1 Cutter
BR-50139	B-2 Cutter
BR-50140	B-2 Cutter
BR-50125	A-1 Cutter
BR-50142	A-2 Cutter
BR-50143	A-3 Cutter
BR-50120	Tungsten Carbide Tipped Cutter

FLEXTOOL CUB GRINDER



PART CODE	SPECIFICATION	DESCRIPTION
CRM-1005THC	250×5×10×10×40	GRINDING PLATE 10" WHITE 30/40GR (5-SEG)
CRM-1005TMC	250×5×10×10×40	GRINDING PLATE 10" GREY 30/40GR (5-SEG)
CRM-1005TABE	250×5×10×10×40	GRINDING PLATE 10" BLACK 30/40GR (5-SEG)
CRM-1005TG20	250×5×10×10×40	GRINDING PLATE 10" WHITE 20GR (5-SEG)
CRM-1010THC	250×10×10×10×40	GRINDING PLATE 10" WHITE 30/40GR (10-SEG)
CRM-1010TMC	250×10×10×10×40	GRINDING PLATE 10" GREY 30/40GR (10-SEG)
CRM-1010TAB	250×10×10×10×40	GRINDING PLATE 10" BLACK 30/40GR (10-SEG)
CRM-1010G20	250×10×10×10×40	GRINDING PLATE 10" WHITE 20GR (10-SEG)
CRM-1020THC	250×20×10×10×40	GRINDING PLATE 10" WHITE 30/40GR (20-SEG)
CRM-1020SHC	250×20×10×10×40	GRINDING PLATE 10" WHITE(S) 30/40GR (20-SEG)
CRM-1020TMC	250×20×10×10×40	GRINDING PLATE 10" GREY 30/40GR (20-SEG)
CRM-1020TAB	250×20×10×10×40	GRINDING PLATE 10" BLACK 30/40GR (20-SEG)
CRM-1020TFF	250×20×10×10×40	GRINDING PLATE 10" WHITE 30/40GR (20-SEG)

MODEL	FLEXTOOL CUB GRINDER
Working width	Ø250 mm
Motor	2.2 kW / 230V
Working speed	1450 rpm
Weight	46 kg



PART CODE	SPECIFICATION	DESCRIPTION
CUB-EZPLATE-250		CUB EZ CHANGE PLATE
QFSHOE-HC16	80×2×10×10×40	QUICK FIT SHOE 16GR WHITE
QFSHOE-MC16	80×2×10×10×40	QUICK FIT SHOE 16GR GREY
QFSHOE-HC20	80×2×10×10×40	QUICK FIT SHOE 20GR WHITE
QFSHOE-MC20	80×2×10×10×40	QUICK FIT SHOE 20GR GREY
QFSHOE-ABE20	80×2×10×10×40	QUICK FIT SHOE 20GR BLACK EXTREME
QFSHOE-HC40	80×2×10×10×40	QUICK FIT SHOE 30/40GR WHITE
QFSHOE-MC40	80×2×10×10×40	QUICK FIT SHOE 30/40GR GREY
QFSHOE-AB40	80×2×10×10×40	QUICK FIT SHOE 30/40GR BLACK
QFSHOE-ABE40	80×2×10×10×40	QUICK FIT SHOE 30/40GR BLACK EXTREME
QFSHOE-MC50	80×2×10×10×40	QUICK FIT SHOE 50/60GR GREY
QFSHOE-HC80	80×2×10×10×40	QUICK FIT SHOE 80GR WHITE
QFSHOE-MC80	80×2×10×10×40	QUICK FIT SHOE 80GR GREY
QFSHOE-SHC100	80×2×10×10×40	QUICK FIT SHOE 100GR WHITE EXTREME
QFSHOE-HC100	80×2×10×10×40	QUICK FIT SHOE 100GR WHITE
QFSHOE-MC100	80×2×10×10×40	QUICK FIT SHOE 100GR GREY
QFSHOE-ABE100	80×2×10×10×40	QUICK FIT SHOE 100GR BLACK
QFSHOE-MC150	80×2×10×10×40	QUICK FIT SHOE 150GR GREY
QFSHOE-MC300	80×2×10×10×40	QUICK FIT SHOE 300GR GREY
QFCUB-PCD		QUICK FIT SHOE PCD -GLUE & RESIN

BRICK & MASONRY SAW

FEATURES

- 240 VOLT, 10 Amp - 1.7 kW, 2.3 H.P. Electric motor.
- Blade size 355 mm.
- +125 mm depth of cut.
- 500 mm length of cut.
- Trolley complete with foot pedal, pneumatic wheels and handles.
- Travel cart with angle jig.
- Powder coated and anodized brick saw and trolley.
- Button for water control on top handle for easy control of water flow.
- Securing latch for travel cart during transportation.
- High quality sealed roller bearings.
- Shipping Weight - 130 kg.
- Dry weight - 110 kg.
- Packaged dimensions - 1220 x 720 x 950.



Blade not included

MODEL	FLEXTOOL BRICK & MASONRY SAW
Part No.	F09503
Motor	240 V Electric 1.7 kW, 10 Amp 2.3HP
Depth of Cut (mm)	125
Weight (kg)	110

FLOOR & ROAD SAWS

FLOOR / ROAD SAWS

FEATURES

- Light and portable one-man operation.
- Versatile street saws.
- Powerful Honda Petrol engines with cyclone air filtration system.
- Simple design for easy maintenance.
- Accurate ACME Thread Raise/Lower.
- Industrial Blade Shaft bearings for long service life.
- Rigid Steel Box Frame for strength/accurate blade tracking.



FP11



FP12

MODEL	FP11	FP12
Part No.	F02516	F02528
Engine	Honda, 13 hp	Honda Self Propelled, 20 hp
Blade Size (mm)	457	508
Depth of Cut (mm)	165	191
Dimensions (mm)	838 x 533 x 940	1143 x 635 x 915
Weight (kg)	123	182

Blade not included

GREEN CONCRETE SAW



FP10



F03580

MODEL	FP10
Part No.	F02509
Engine	Honda Green Saw, 6.5 hp
Blade Size (mm)	254
Depth of Cut (mm)	82
Dimensions (mm)	1016 x 1143 x 330
Weight (kg)	47

Blade not included

CONTINUOUS RIM



Continuous rim blade for use on power tools and tile saws for precise and chip free cutting of granite, ceramic, terracotta and porcelain tiles. Can be used both wet or dry.

PART CODE	SPECIFICATION	DESCRIPTION
8HPB105T	107×8×1.6×1.2	BLADETEC-CRG105 TRADE
8HPB115T	117×8×1.6×1.2	BLADETEC-CRG115 TRADE
8HPB125T	127×8×1.6×1.2	BLADETEC-CRG125 TRADE
10HPB150T	152×10×1.6×1.2	BLADETEC-CRG150 TRADE
10HPB180T	178×10×1.6×1.2	BLADETEC-CRG180 TRADE
10HPB200T	203×10×1.6×1.2	BLADETEC-CRG200 TRADE
10HPB230T	230×10×1.8×1.4	BLADETEC-CRG230 TRADE

SEGMENTED RIM



Segmented rim blade for general purpose cutting of masonry, brick and concrete products along with softer stone and terrazzo. Can be used both wet or dry.

PART CODE	SPECIFICATION	DESCRIPTION
10A115T	115×10×1.8×30×9×1.2	BLADETEC-SE115 TRADE
10A125T	125×10×1.8×30×10×1.2	BLADETEC-SE125 TRADE
10A150T	150×10×2.0×34×11×1.4	BLADETEC-SE150 TRADE
10A178T	178×10×2.2×32×14×1.6	BLADETEC-SE180 TRADE
10A200T	200×10×2.4×37×14×1.6	BLADETEC-SE200 TRADE
10A230T	230×10×2.4×38×16×1.6	BLADETEC-SE230 TRADE

THIN TURBO RIM



Thin turbo blade for fast chip free cutting of very hard materials including ceramic and porcelain tiles, clay bricks, marble and slate. Commonly used on angle grinders in dry application.

PART CODE	SPECIFICATION	DESCRIPTION
10HPABF105TT	105×10×1.4×1.0	BLADETEC-TT105 TRADE
10HPABF115TT	115×10×1.4×1.0	BLADETEC-TT115 TRADE
10HPABF125TT	125×10×1.4×1.0	BLADETEC-TT125 TRADE

V-SEGMENT CRACK CHASER



Premium quality crack chasing blade with a "V" type segment designed to follow and widen cracks in concrete prior to repair. Most commonly used by the professional in dry application.

PART CODE	SPECIFICATION	DESCRIPTION
HFSTK105P	100×12×9.5×30×7×5.5 (76)	BLADETEC CRACK CHASER 105MM
HFSTK125P	125×12×9.5×32×9×4.0 (101)	BLADETEC CRACK CHASER 125MM
HFSTK180P	178×12×9.5×34×13×4.0 (154)	BLADETEC CRACK CHASER 180MM

TURBO RIM (ABRASIVE)



Premium quality Turbo rim blade for cutting softer type materials giving fast efficient cutting with extended life. Types of materials recommended for cutting include concrete blocks/pavers, sandstone and aerated concrete. Can be used both wet or dry.

PART CODE	SPECIFICATION	DESCRIPTION
F03580	230×10×2.6×33×18×1.8	BLADETEC-TA230 PREMIUM

6MM WIDE TUCK POINT



Premium quality 6.5mm wide blade used for tuck pointing and cleaning of mortar joints. Most commonly used by the professional in dry application.

PART CODE	SPECIFICATION	DESCRIPTION
HFTK105P-6	105×10×6.35×30×8×4.0 (85)	BLADETEC-TU105/65 PREMIUM
HFTK115P-6	115×10×6.35×30×9×4.0 (95)	BLADETEC-TU115/65 PREMIUM
HFTK125P-6	125×10×6.35×30×10×4.0 (105)	BLADETEC-TU125/65 PREMIUM
HFTK180P-6	178×10×6.35×32×14×4.0 (158)	BLADETEC-TU180/65 PREMIUM

TURBO RIM



Turbo rim blade used in a variety a general purpose cutting applications where a chip free cut is not required. Used for cutting materials such as clay and concrete bricks, cement sheet, general concrete (not reinforced), concrete roof tile and clay/concrete pipes. Can be used both wet or dry.

PART CODE	SPECIFICATION	DESCRIPTION
10HPABF105T	105×10×2.0×1.2	BLADETEC-T105 TRADE
10HPABF115T	115×10×2.0×1.2	BLADETEC-T115 TRADE
10HPABF125T	125×10×2.0×1.2	BLADETEC-T125 TRADE
10HPABF150T	150×10×2.0×1.2	BLADETEC-T150 TRADE
10HPABF180T	180×10×2.4×1.6	BLADETEC-T180 TRADE
10HPABF200T	200×10×2.4×1.6	BLADETEC-T200 TRADE
10HPABF230T	230×10×2.6×1.8	BLADETEC-T230 TRADE

9.5MM WIDE TUCK POINT



Premium quality 9.5mm wide blade used for tuck pointing and cleaning of mortar joints. Most commonly used by the professional in dry application.

PART CODE	SPECIFICATION	DESCRIPTION
HFTK105P-9	105×10×9.5×30×8×4.0 (85)	BLADETEC-TU105/95 PREMIUM
HFTK115P-9	115×10×9.5×30×9×4.0 (95)	BLADETEC-TU115/95 PREMIUM
HFTK125P-9	125×10×9.5×30×10×4.0 (105)	BLADETEC-TU125/95 PREMIUM
HFTK180P-9	178×10×9.5×32×14×4.0 (158)	BLADETEC-TU180/95 PREMIUM

PREMIUM BLADES



LASER WELDED GOLD

Laser welded blade commonly used on table saws and brick saws for cutting hard materials such as clay bricks and pavers. Can also be used on petrol powered hand saws and floor saws under 24hp for cutting very hard concrete. Recommended for wet use only.

PART CODE	SPECIFICATION	DESCRIPTION
LW300T	310×10×3.2×40×21(3)×2.2 (290)	BLADETEC-GOLD-0305 TRADE
LW350T	360×10×3.5×40×24(3)×2.2 (340)	BLADETEC-GOLD-0355 TRADE
LW400T	410×10×3.5×40×28×2.5 (390)	BLADETEC-GOLD-0415 TRADE



LASER WELDED WHITE

Laser welded blade for general purpose cutting of both reinforced and non-reinforced concrete. Can be used on hand held petrol saws and floor saws under 24hp. Should be used wet.

PART CODE	SPECIFICATION	DESCRIPTION
LWD-1-300T	310×10×3.2×40×21(3)×2.2 (290)	BLADETEC-WHITE-0305 TRADE
LWD-1-350T	360×10×3.5×40×24(3)×2.5 (340)	BLADETEC-WHITE-0355 TRADE
LWD-1-400T	410×10×3.5×40×28(4)×2.5 (390)	BLADETEC-WHITE-0415 TRADE
LWD-1-450P	460×10×4.0×40×32(3)×2.8 (440)	BLADETEC-WHITE-0460 PREMIUM
LWD-1-500P	510×10×4.0×40×36(4)×2.8 (490)	BLADETEC-WHITE-0510 PREMIUM



LASER WELDED COMBI

Laser welded combination blade used for cutting a mixture of concrete and softer materials such as asphalt, sandstone and besser brick. Can be used on hand held petrol saws, floor saws under 24hp and bench/brick saws. Should be used wet.

PART CODE	SPECIFICATION	DESCRIPTION
LWD-1C-300T	310×10×3.2×40×21(3)×2.2 (290)	BLADETEC-COMBI-0305 TRADE
LWD-1C-350T	360×10×3.5×40×24(3)×2.5 (340)	BLADETEC-COMBI-0355 TRADE
LWD-1C-400T	410×10×3.5×40×28(4)×2.5 (390)	BLADETEC-COMBI-0415 TRADE
LWD-1C-450P	460×10×4.0×40×32(3)×2.8 (440)	BLADETEC-COMBI-0460 PREMIUM
LWD-1C-500P	510×10×4.0×40×36(4)×2.8 (490)	BLADETEC-COMBI-0510 PREMIUM



LASER WELDED BLACK

Laser welded blade for all asphalt cutting applications with a drop segmented for under-cut protection. Used on floor saws under 25hp. Should be used wet.

PART CODE	SPECIFICATION	DESCRIPTION
LWD-2-300T	310×10×3.2×40×21(3)×2.2 (290)	BLADETEC-BLACK-0305 TRADE
LWD-2-350T	360×10×3.5×40×24(3)×2.5 (340)	BLADETEC-BLACK-0355 TRADE
LWD-2-400T	410×10×3.5×40×28(4)×2.5 (390)	BLADETEC-BLACK-0415 TRADE
LWD-2-450P	460×10×4.0×40×32(3)×2.8 (440)	BLADETEC-BLACK-0460 PREMIUM
LWD-2-500P	510×10×4.0×40×36(4)×2.8 (490)	BLADETEC-BLACK-0510 PREMIUM



LASER WELDED BRICK (SILENT)

Premium quality laser welded "Silent" blade with a sandwich type steel core designed to keep cutting noise down to a minimum. Used for cutting hard clay bricks and pavers and non abrasive blocks. Should be operated only on brick and bench saws under 5hp and used with water.

PART CODE	SPECIFICATION	DESCRIPTION
LWFUT350SLP	350×10×3.2×40×24×2.2 (330)-SWCH	BLADETEC-BR350/SLN PREMIUM



VACUUM BRAZED TECHNOLOGY (NEW)

New technology vacuum brazed blade for general type cutting of most materials including concrete, masonry, metal, wood, plastic, steel, cast iron, copper, brick, cement sheet, timber, tree roots, PVC, rubber and polycarbonate. Mainly used on petrol powered hand saws and can be used both wet and dry. Also known as a rescue blade.

PART CODE	SPECIFICATION	DESCRIPTION
LWCPS350-B01-GVT7	350×8×3.6×40×21×2.2(290)-GVT7	BLADETEC-ALCUT300/S PREMIUM



PROFESSIONAL BLADES

PART CODE	SPECIFICATION	DESCRIPTION
HS414-3.0/2.4BR	414×12×3.0×40×28×2.4 (390)	HANDSAW BLADE 414MM V-MAX
RS464-3.6/2.8	464×12×3.6×40×32(4)×2.8 (440)	ROADSAW BLADE 464MM (3.6) V-MAX
RS464-4.2/3.2BR	464×12×4.2×40×32×3.2 (440)	ROADSAW BLADE 464MM (4.2) V-MAX
LWD-300-10W	310×10×9.5×40×21×4.0 (330)	DIAMOND BLADE 12" - 10MM WIDE (CONC)
LWD-350-10W	360×10×9.5×40×24×4.0 (330)	DIAMOND BLADE 14" - 10MM WIDE (CONC)



BRICK & MASONRY SAW

See page 23 for details

SINGLE ROW



Single row diamond cup wheel suitable for grinding a wide range of construction materials at an economical cost. Materials include concrete, bricks, concrete pavers stone, concrete blocks etc. Should be used dry on electric power tools.

PART CODE	SPECIFICATION	ARBOR	DESCRIPTION
SGP-1-100T	100×8×7×8×30	22.2	CUP100SRE- TRADE
SGP-1-125T	125×10×7×8×30	22.2	CUP125SRE- TRADE
SGP-1-180T	178×14×7×8×30	22.2	CUP180SRE- TRADE

SPIRAL SEG



Spiral diamond cup wheels available with 9, 12 and 24 segments for aggressive grinding to more controlled type application where extended life is desired. Should be used dry on power tools or wet/dry if used on a walk behind floor grinder. Suitable for grinding concrete, bricks, concrete pavers, stone, concrete blocks etc.

PART CODE	SPECIFICATION	ARBOR	DESCRIPTION
TSGP100-9	100×9×7×5×23	22.2/16	CUP SPIRAL-100S9
TSGP125-9	125×9×7×8×23	22.2	CUP SPIRAL-125S9
TSGP180-12	178×12×7×8×28	22.2	CUP SPIRAL-180S12
TSGP180-24	178×24×7×8×28	22.2	CUP SPIRAL-180S24

TURBO



Turbo diamond cup wheel with a coarse grit diamond designed for rapid removal of a wide range of construction materials with exceptional life. Materials include concrete, bricks, concrete pavers, stone, concrete blocks etc. Should be used dry on electric power tools.

PART CODE	SPECIFICATION	ARBOR	DESCRIPTION
GJB100-GCA2-C	100×6×20	22.2/16	CUP TURBO 100C
GJB100-GCA2-M	100×6×20	22.2/16	CUP TURBO 100M
GJB100-GCA2-F	100×6×20	22.2/16	CUP TURBO 100F

5 - SEGMENT



5 - segment diamond cup wheel at an economical cost designed for aggressive grinding of wide range of construction materials such as concrete, bricks, concrete pavers, stone, concrete blocks etc. Also suitable for some epoxy removal. Should be used dry on power tools or wet/dry if used on a walk behind floor grinder.

PART CODE	SPECIFICATION	ARBOR	DESCRIPTION
TSGP180-S5	178×5×7×8×28	22.2	CUP SP-SUPA 180S5

TURBO



Turbo diamond cup wheel with a medium grit diamond designed for removal of a wide range of construction materials without deep scratching and giving exceptional life. Materials include concrete, bricks, concrete pavers, stone, concrete blocks etc. Should be used dry on electric power tools.

PART CODE	SPECIFICATION	ARBOR	DESCRIPTION
GJB125-GCA2-C	125×6×20	22.2	CUP TURBO 125C
GJB125-GCA2-M	125×6×20	22.2	CUP TURBO 125M
GJB125-GCA2-F	125×6×20	22.2	CUP TURBO 125F

R-SHAPE SEGMENT



New design "R" segment designed for rapid removal of concrete and hard painted coatings which have been applied to concrete Should be used dry on power tools or wet/dry if used on a walk behind floor grinder.

PART CODE	SPECIFICATION	ARBOR	DESCRIPTION
TSGR125	125×9×7×15×36	22.2	CUP125RC R-SEGMENT
TSGR180	178×14×7×20×34	22.2	CUP180RC R-SEGMENT

TURBO



Turbo diamond cup wheel with a fine grit diamond designed for fine grinding or removing scratches and finishing off on a wide range of construction materials and giving exceptional life. Materials include concrete, bricks, concrete pavers, stone, concrete blocks etc. Should be used dry on electric power tools.

PART CODE	SPECIFICATION	ARBOR	DESCRIPTION
GJB180-GCA2-C	180×6×20	22.2	CUP TURBO 180C
GJB180-GCA2-M	180×6×20	22.2	CUP TURBO 180M
GJB180-GCA2-F	180×6×20	22.2	CUP TURBO 180F

PCD



Poly Crystalline diamond cup wheels specifically designed for removal of glues and epoxies which are excessively built up on concrete surfaces. Softer type "chewy" materials are no match for this aggressive cup wheel. Should be used dry on power tools or wet/dry if used on a walk behind floor grinder.

PART CODE	SPECIFICATION	ARBOR	DESCRIPTION
DRCW125-PCD	125×12×3×1.5×3	22.2	CUP PCD 125MM (12 TIP)
DRCW175-PCD	175×6×3×1.5×3	22.2	CUP PCD 175MM (6 TIP)
DRCW175-PCD	175×12×3×1.5×3	22.2	CUP PCD 175MM (12 TIP)
DRCW175-PCD	175×24×3×1.5×3	22.2	CUP PCD 175MM (24 TIP)

SOIL COMPACTION

FLEXTOOL FORWARD PLATE COMPACTORS

Flextool forward plate compactors are suitable for a wide range of compaction applications. They are highly portable, easily manoeuvrable and deliver excellent compaction results.

FEATURES

- Solid, high strength steel base plates with curved edges.
- Heavy duty handle mounts reduce operator fatigue.
- Central lifting hook for easy and safe onsite handling.
- Conveniently placed side lifting handles.
- Fold over or fold down handles for easy transport and storage.
- Fixed wheels for easy transportation around sites (CP60/70 Only).



MODEL		CP60	CP70	CP80	CP87
Product Code		F03056	F03055	F03194	F02366
Operating Weight	kg	66	73	77	86
Plate Size (w x l)	mm	360 x 510	420 x 510	460 x 610	500 x 620
Centrifugal Force (Max)	kN	10.5	12.3	19.8	15.2
Vibration Frequency	V.P.M	5,800	5,800	7,000	5,800
Max Travel Speed	m/min	20	20	26	26
Max Gradeability	%	25	25	35	30
Max Compacted Area	m ² /h	388	453	717	780
Engine Make		Robin	Honda	Honda	Honda
Engine Model		EY20-3D	GX160	GX160	GX160
Max Rated Power	Hp	5	5.5	5.5	5.5
Fuel Type		Petrol	Petrol	Petrol	Petrol

ACCESSORIES

F09986	Water Tank (suits CP87)
F09870	Wheel / Transport Kit (suits CP87)



FLEXTOOL TAMPING RAMMER

FEATURES

- Fitted with a four stage air filtration system.
- Oil bath lubricated.
- No need for mixed fuel.
- Lay down to 90° in any direction.
- Lower operating noise.
- Reduced engine emissions compared to two-stroke engines.
- Automatic decompression for easy starting.



MODEL	PART NO.	ENGINE TYPE	FUEL	PLATE SIZE L X W	JUMPING STROKE	IMPACT FORCE	WEIGHT (KG)
RF68	F03900	Honda GX100	Petrol	330 x 285 mm	40-85	12.8 kN	68

FLEXTOOL PEDESTRIAN ROLLER

FEATURES

- Deadman Control and Reversing Protection for maximum operator safety.
- Ergonomically designed height-adjustable handle offers convenience and comfort to operator.
- Self-Cleaning scrapers prevent the buildup of dirt.
- Beveled drum edge leave no mark on the ground and asphalt.
- Side Clearance and Kerb Clearance allow for a closest approach to pavement, wall, kerb and other obstacles.
- Compact design for easy handling in confined areas.
- Thick drum shells for longer drum life.
- Large corrosion-free water tank feature in easily removable for filling or cleaning.
- Hydrostatic drive system provide infinitely variable forward and reverse speed.
- Low maintenance with sealed for life vibrator bearings and robust protection for travel and vibration housing.



MODEL	PART NO.	ENGINE TYPE	POWER (KW/HP)	OPERATIONS WEIGHT (KG)	DRUM DIAMETER (MM)	CENTRIFUGAL FORCE (KN)	STATIC LINEAR FORCE (N/CM)	FREQUENCY (KW VMP/HZ)	TRAVEL SPEED (KM/H)	WATER TANK CAPACITY (L)
SVR58	FR-500	Honda GX160	4.0/5.5	185	580 x Ø400	10	28.5	4560/70	0-1.5	15

PETROL DRIVE UNITS

APPLICATIONS

- All model 212 Submersible Pumps
- All model VP Concrete Vibrators

FEATURES

- Dished steel base for dragging across reinforcing mesh (F01620 & F02062 Only)
- Spring and rubber mounts for vibration isolation (excludes F02062)
- Heavy duty motor protection frame

LIFTING HOOK KIT

F03189 – Lifting Hook Kit
(Suits model DP4 Drive Units Only)
Kit includes mounting componentry



PETROL MODEL		DP4
Product Code		F02062EX
Operating Weight	kg	25
Engine Speed	rpm	3,000
Vibration Isolators		No
Engine Make		Honda
Engine Model		GX160
Max Rated Power	Hp	5.5
Fuel Type		Petrol

DIESEL DRIVE UNITS

APPLICATIONS

- All model 212 Submersible Pumps
- All model VP Concrete Vibrators
- Hazardous areas (mining, tunnels & refineries)

FEATURES

- Recoil & electric start options
- Rubber mounts for vibration isolation
- Heavy duty motor protection frame



DIESEL MODEL		DD4Y
Product Code		F01711
Operating Weight	kg	43
Engine Speed	rpm	3,600
Vibration Isolators		Yes
Engine Make		Yanmar
Engine Model		L48
Max Rated Power	Hp	4.7
Fuel Type		Diesel

FLEXTOOL PUMPS

GENERAL PURPOSE

- Standard flexshaft
- Aluminium pump body for improved portability
- 2 dog drive coupling

APPLICATIONS

- Excavations pits
- Construction sites
- Pier holes
- Dams
- Swimming pools
- Trenches

ABRASION RESISTANT PUMPS

- Standard flexshaft
- Cast iron pump body for longer life
- 2 dog drive coupling

APPLICATIONS

- Quarries
- Sandy soils
- Sand pits
- Gravel washings



MODEL		P212G	P212A	
Product Code		F01836EX	F02255EX	F02481EX
Flexshaft Length		6	9	6
Operating Weight	kg	26	34	31
Shaft Inner Core Dia	mm	13	13	13
Shaft Outer Casing Dia	mm	32	32	32
Discharge Dia	mm (in)	50 (2" BSP)	50 (2" BSP)	50 (2" BSP)
Max. Discharge Head	m	26	26	26
Max. Discharge	l/h	63,000	63,000	63,000
Solids Capacity	mm	28	28	28

FLEXTOOL EXTENSION FLEXSHAFTS

Flextool extension shafts extend the length of an existing submersible pump and concrete vibrators. Fitted with the same 60mm quick action coupling as the drive units, these extensions allow for quick onsite connection.

APPLICATIONS

- Deep columns.
- Elevated formwork.
- Deep excavations.



MODEL		PVX-3
Product Code		F02611EX
Flexshaft Length		3
Operating Weight	kg	11
Shaft Inner Core Dia	mm	13
Shaft Outer Casing Dia	mm	32

LAY FLAT HOSE

FEATURES

- Lightweight, reinforced PVC lay flat hose, rolls flat and saves space.
- Available in standard and heavy duty 20m kits and cut lengths.



LAY FLAT HOSE				
Product Code		F02851	PP-170060060	F08123
Hose Type		Blue - Std Duty	Red - Heavy Duty	Blue - Std Duty
Length	m	20	20	Per Metre
Hose Dia	mm (in)	50 (2')	50 (2')	50 (2')
Fitted With		Coupling & Joiner	Coupling & Joiner	-

CAMLOCK HOSE FITTINGS

FEATURES

- Quick action - eliminates problems with dirty threads.
- Joiners enable separate hoses to be coupled together.

CAMLOCK HOSE FITTINGS					
Product Code		F05678	F07456	F07469	F07457
Fitting Type		Hose Clamp	Coupling	Adaptor	Joiner
Size	mm (in)	50-75mm (2'-3')	50 (2')	50 (2')	50 (2')
Material		Steel	Aluminium	Aluminium	Aluminium



Clamp



Adaptor



Coupling



Joiner

PORTAPUMP

APPLICATION

For pumping waste water with ease from footings, trenches, pits and foundations.

PORTABLE POWER

The PortaPump™ provides a solution for pumping waste water with an easy to use portable unit. There is no need for electricity supply or separate pump units. The Honda four-stroke motor provides hassle free operation and in comparison to a two-stroke motor uses less fuel, has reduced engine emissions and no need for mixed fuel.

LIGHTWEIGHT

The unit is light and balanced, is fitted with an adjustable handle and carry strap for user comfort and complete control.

EASY TO USE

A convenient on/off switch and throttle control built into the handle.

QUALITY MANUFACTURE

Flextool pumps are manufactured in Australia. The name you can trust.



Model	PP32	
Product Code	F03600EX	
Flexshaft Length	mm	545
Operating Weight	kg	13
Shaft Inner Core Dia	mm	7.5
Shaft Outer Casing Dia	mm	28
Discharge Dia	mm (in)	32 (1.5)
Max. Discharge Head	m	5
Max. Discharge	l/h	125
Engine Make	Honda	
Engine Model	GX35	
Max Rated Power	Hp	1.5
Fuel Type	Petrol	

ACCESSORIES

F03637	Extension Hose 32mm x 5m
F03664	Strainer

PORTAPUMP ATTACHMENT KIT


If you already own a Flextool PortaVibe you are already half way to experiencing the versatility and performance of the PortaPump. The PortaPump kit includes all you need for quick connection to an existing PortaVibe .



ACCESSORIES

F03660	PortaPump kit Includes: Pump, Strainer, Hose & Case
--------	---

SUITABLE FOR: HITACHI, KANGO, MAKITA, RYOBI - 21MM HEX




	PART NO.	DESCRIPTION	LENGTH MM	PACK QTY
	K09962	Moil Point	450	5
	K09907	Flat Chisel	450	5
	K09913	Wide Scaling Chisel	300	5
	K09923	Clay Spade	500	5
	K09606	FCT Shank Suits floor cleaning tool	400	5

TO SUIT MEDIUM PNEUMATIC - 22MM HEX



	PART NO.	DESCRIPTION	LENGTH MM	PACK QTY
	SP-MP4X18	Moil Point	540	5
	SP-NC4X18	Flat Chisel	540	5

TO SUIT MEDIUM PNEUMATIC - 28MM HEX






	PART NO.	DESCRIPTION	LENGTH MM	PACK QTY
	SP-MP2X18	Moil Point	610	5
	SP-NC2X18	Flat Chisel	610	5
	SP-AC2W	Asphalt Cutter	500	5
	SP-CS2	Clay Spade	500	5

TYPE OF WORKING END	PART NO.	DESCRIPTION	LENGTH MM	PACK QTY
Floor Scraper	K08979	Complete with 2.0mm thick blade.	280	5
Blade	K08986	2.0mm Blade for Floor Scraper	170	5
Repair Kit to Floor Scraper	K061040K	18pcs Repair Part for Floor Scraper. Contents: 2 - Rubber, 4 - Screw, 4 - Nut 8 - Spring Washer.		5

POWER HAMMER TOOLS


SUITABLE FOR SDS-MAX SHANK



	PART NO.	DESCRIPTION	LENGTH MM	PACK QTY
	BS1-618-600-011	Moil Point	400	5
	BS1-618-600-202	Flat Chisel	400	5
	BS9913	Wide Scaling Chisel	300	5
	BS1-618-601-017S	Clay Spade	500	5
	BS9923A	Asphalt Cutter	500	5
	BS9606	FCT Shank To Suit Floor Cleaning Tool	400	5

SUITABLE FOR: HITACHI, KANGO, MAKITA, RYOBI - 30MM



	PART NO.	DESCRIPTION	LENGTH MM	PACK QTY
	HT944961	Moil Point	450	5
	HT944962	Flat Chisel	450	5
	HT944964	Wide Scaling Chisel	410	5
	HT944967S	Clay Spade	500	5
	HT944968	Asphalt Cutter	500	5
	HT9606	FCT Shank To Suit Floor Cleaning Tool	400	5

SUITABLE FOR SDS - PLUS SHANK

	PART NO.	DESCRIPTION	LENGTH MM	PACK QTY
	BS1-618-600-009	Moil Point	250	5
	BS1-618-600-010	Flat Chisel	250	5
	BS1-618-601-002	40mm Wide Chisel	250	5

MULTI-FIT DRILL BITS (FITS ALL SDS PLUS) SUITABLE FOR ALL SDS MAX BRANDS



PART NO.	HEAD DIA. MM	HELICOIL LENGTH MM	OVERALL LENGTH MM
K081010	5.0	50	110
K081020	5.0	100	160
K081030	5.5	50	110
K081000	5.5	100	160
K081040	6.0	50	110
K081050	6.0	100	160
K081060	6.5	50	110
K081070	6.5	100	160
K081090	7.0	100	160
K081100	8.0	100	160
K081110	8.0	100	160
K081130	8.0	200	260
K081180	10.0	100	160

PART NO.	HEAD DIA. MM	HELICOIL LENGTH MM	OVERALL LENGTH MM
K081200	10.0	200	260
K081220	10.0	400	450
K081250	12.0	100	160
K081280	12.0	200	260
K081290	12.0	400	450
K081310	13.0	200	260
K081340	14.0	200	260
K081370	14.0	400	450
K081390	15.0	200	260
K081410	16.0	150	200
K081420	16.0	200	260
K081430	16.0	400	450
K081460	18.0	200	250

PART NO.	HEAD DIA. MM	HELICOIL LENGTH MM	OVERALL LENGTH MM
K081480	18.0	400	450
K081481	19.0	200	250
K081482	19.0	400	450
K081520	20.0	200	250
K081540	20.0	400	450
K081550	22.0	200	250
K081560	22.0	400	450
K081590	24.0	200	250
K081600	24.0	400	450
K081610	25.0	200	250
K081620	25.0	400	450
K081630	26.0	200	250
K081640	26.0	400	450

SDS MAX DRILL BITS (QUADRO TIP) SUITABLE FOR ALL SDS MAX BRANDS



PART NO.	HEAD DIA. MM	HELICOIL LENGTH MM	OVERALL LENGTH MM
K327000	12	215	340
K327010	12	415	540
K327020	14	215	340
K327030	14	415	540
K327035	15	215	340
K327036	15	415	540
K327040	16	215	340
K327050	16	415	540
K327060	18	215	340
K327070	18	415	540
K327075	19	415	340

PART NO.	HEAD DIA. MM	HELICOIL LENGTH MM	OVERALL LENGTH MM
K327076	19	415	540
K327080	20	195	320
K327090	20	395	520
K327095	22	195	320
K327100	22	395	520
K327120	24	195	320
K327130	24	395	520
K327140	25	195	320
K327150	25	395	520
K327155	26	195	320
K327156	26	395	520

PART NO.	HEAD DIA. MM	HELICOIL LENGTH MM	OVERALL LENGTH MM
K327170	28	245	370
K327180	28	445	570
K327200	30	245	370
K327210	30	445	570
K327215	32	245	370
K327220	32	445	570
K327240	35	245	370
K327250	35	445	570
K327270	38	245	370
K327280	38	445	570

EMER-IMPACT

- Decorative façade coating, water based, durable, flexible with full colour range.

USES

Emer-Impact is suitable for application to most common facade substrates including concrete render, flush jointed block and brickwork, fibre cement sheeting, tilt-up constructions and AAC blocks and panels after recommended primer/sealer application.

PART ID	DESCRIPTION
561776	EMER-IMPACT A BASE 15L
561778	EMER-IMPACT B BASE 15L
561780	EMER-IMPACT C BASE 15L
561393	EMER-IMPACT TINTS 15L



EMER-CLAD WATERPROOFING

- Acrylic, flexible waterproofing membrane, for internal and UV exposed external areas - colour range available.

USES

Emer-Clad is suitable for application to many common substrates including concrete, fibrous cement products, metals, timber with priming required on most substrates.

PART ID	DESCRIPTION
740040	EMER-CLAD MATT LIGHT GREY 4L
561723	EMER-CLAD MATT LIGHT GREY 15L
561724	EMER-CLAD MATT MID GREY 15L
561726	EMER-CLAD MATT SANDSTONE 15L
561720	EMER-CLAD MATT WHITE 15L
561770	EMER-CLAD MATT A BASE 15L
561765	EMER-CLAD MATT B BASE 15L
561760	EMER-CLAD MATT C BASE 15L
561719	EMER-CLAD MATT TINTS 15L
740015	EMER-CLAD MATT WHITE 4L
740045	EMER-CLAD MATT MID GREY 4L
561755	EMER-CLAD SATIN A BASE 15L
561750	EMER-CLAD SATIN B BASE 15L
561745	EMER-CLAD SATIN C BASE 15L
561388	EMER-CLAD SATIN TINTS 15L
740205	EMER-CLAD SATIN WHITE 4L
561700	EMER-CLAD SATIN WHITE 15L
740220	EMER-CLAD SATIN LIGHT GREY 4L
561703	EMER-CLAD SATIN LIGHT GREY 15L
740225	EMER-CLAD SATIN MID GREY 4L
561704	EMER-CLAD SATIN MID GREY 15L
740245	EMER-CLAD SATIN SANDSTONE 4L
561706	EMER-CLAD SATIN SANDSTONE 15L



EMER-CLAD FIRECHECK

- Fire retardant protective coating for concrete and masonry surface.

USES

On timber and all types of building boards, ceiling tiles, panelling etc. Over polyurethane and styrene foam insulation, pipe lagging or similar it provides a fire retardant, abrasion resistant, flexible skin that also withstands weather and wear.

PART ID	DESCRIPTION
561005	EMER-CLAD FIRECHECK WHITE 15L



EMER-PROOF ECOFLEX

- High performance, single component, water based rubberised waterproofing membrane.

USES

Developed for the residential & commercial construction industry. It is solvent free, non-flammable, and forms a highly flexible monolithic waterproofing membrane.

PART ID	DESCRIPTION
730730	EMER-PROOF ECOFLEX 20L



EMER-PROOF 250

- Polymer / cementitious two part waterproofing membrane.

USES

Emer-Proof 250 is suitable for a wide range of under tile waterproofing applications such as foundations, wet areas & showers, podiums, terraces, balconies & deck areas tiled pools & water features, water tanks & water storage areas, including potable conditions. Also is suitable for subterranean areas like retaining walls.

PART ID	DESCRIPTION
743250	Emer-Proof 250 Part A
743255	Emer-Proof 250 Part B 15kg



EMER-PROOF 695

- Water based fibre reinforced, flexible, fast drying, modified polyurethane, waterproofing membrane, for under tile internal and external areas.

USES

Emer-Proof 695 has been developed for waterproofing of internal and external under-tile applications. Such as shower recesses, bathrooms, laundries, and balconies or terrace areas.

PART ID	DESCRIPTION
734051	EMER-PROOF 695 15L



EMER-PROOF 750

- High performance, tough, flexible, polyurethane waterproofing membrane, for internal and external under tile areas.

USES

The high elasticity, excellent bond and low water permeability of Emer-Proof 750 make it ideal for a wide range of water/vapour proofing applications such as foundations, basements, tunnels, ground floors, suspended floors, roof terraces, balconies, patios, bridges, inspection pits, sewage works, inverted roofs, bathrooms and wet areas.

PART ID	DESCRIPTION
734101	EMER-PROOF 750 GREY 15L
734102	EMER-PROOF 750-LV GREY 15L



TILEBOND FLEX

- Rubber modified, flexible, off-white, cement based, ceramic tile adhesive for use with Emer-Proof 680.

USES

Tilebond Flex can be used both internal / external on walls and floors. It can be used to bond a variety of different tiles to a variety of different substrates. It is fast setting, meaning you can commence grouting 6-8 hours @ 20°C after completion of tiling.

PART ID	DESCRIPTION
307001	EMER-PROOF TILEBOND FLEX 20KG



EMER-PROOF AQUA BARRIER

- Water borne epoxy membrane / barrier for porous surfaces.

USES

Emer-Proof Aqua Barrier is a grey, two-component, matt to semi-gloss epoxy coating. When applied at 200 microns dry film thickness will provide a tenaciously bonded coating controlling the transmission of liquid moisture.

PART ID	DESCRIPTION
405015	GREY 20L KIT



EMER-PROOF EJB TAPE

- Superior sealing system for critical areas over traditional bondbreaking sealants and tapes.

USES

Emer-Proof EJB Tape has been developed as a superior alternative to traditional bond breaking methods for sealing critical movement zones. Emer-Proof EJB Tape is suitable for internal, external underground and fully immersed applications.

PART ID	DESCRIPTION
743265	EMER-PROOF EJB TAPE
743270	EMER-PROOF EJB TAPE INTERNAL CORNERS
743275	EMER-PROOF EJB TAPE EXTERNAL CORNERS



SONTARA TAPE

- Non woven reinforcement fabric

USES

Sontara Reinforcement Fabric is a non woven fabric designed for use with liquid membrane and high build coating products for enhancing reinforcement, tensile strength and uniform layers in liquid membrane applications.

PART ID	DESCRIPTION
771086	SONTARA TAPE 100MMX100M ROLL
771087	SONTARA TAPE 150MM X 100M ROLL
771088	SONTARA TAPE 200MMX100M ROLL
771089	SONTARA TAPE 300MMX100M ROLL
771090	SONTARA TAPE 1M X 100M ROLL



POLYFAB LD 7230W

PART ID	DESCRIPTION
771193	POLYFAB LD 7230W 1.27X1M



EMER-PROOF SBR PRIMER

- SBR latex primer & waterproofing additive.

USES

Emer-Proof SBR Primer is a single component fast drying primer that provides excellent high bonding and penetrating properties into concrete and masonry surfaces. In addition to its priming properties (for Emer-Proof 250), Emer-Proof SBR Primer can also be used as a waterproofing additive for cement based products to enhance adhesion, water resistance and compressive strength.

PART ID	DESCRIPTION
743280	EMER-PROOF SBR PRIMER



EMER-PROOF WB PRIMER

- Economical, water based concrete and masonry primer.

USES

Emer-Proof WB Primer can be used as a primer/sealer coating on concrete, brick, tilt-up panels etc. Provides an even non absorbent substrate over which can be applied Emer-Proof 695 membrane systems.

PART ID	DESCRIPTION
320030	EMER-PROOF WB PRIMER 5L



EMER-ACRYLIC SEALER

- Economical, water based concentrate and masonry primer.

USES

Emer-Acrylic Sealer can be used as a primer/sealer coating on concrete, brick, tilt-up panels etc. Provides an even non absorbent substrate over which can be applied Emer-impact or Emer-Clad membrane systems.

PART ID	DESCRIPTION
561452	EMER-ACRYLIC SEALER 4L
561785	EMER-ACRYLIC SEALER 15L



EMER-COAT CLEAR SEALER

- Penetrating, solvent based, clear masonry and concrete binder/sealer.

USES

As a primer, sealer coating on fibre cement, masonry, blockwork, brick or other masonry surfaces. Provides an excellent seal over aged, weathered paintwork and will penetrate powdery coatings such as "kalsomine" and "distemper".

PART ID	DESCRIPTION
561017	EMER-COAT CLEAR SEALER 1L
561018	EMER-COAT CLEAR SEALER 4L
561019	EMER-COAT CLEAR SEALER 20L



EMER-PATCH (SMOOTH)

- Smooth acrylic patching compound.

USES

For the repair of surface imperfections and defects in concrete and masonry surfaces.

PART ID	DESCRIPTION
773003	EMER-PATCH SMOOTH 15L



EMER-BOND

- Waterborne, anti-corrosive primer.

USES

For fabrication and maintenance work generally. Suitable as a shop primer due to its quick drying, outstanding adhesion, good resistance to corrosion and the absence of health and fire hazards. For application in special conditions, consult Parchem for detailed information.

PART ID	DESCRIPTION
561615	EMER-BOND PRIMER 1L
561616	EMER-BOND PRIMER 4L
561790	EMER-BOND PRIMER 15L



EMER-TAN

- Tannin phosphate, rust-converter for corroding metal, pre-painting treatment.

USES

The versatility of Emer-Tan application makes it suitable for small or large surfaces, inaccessible areas or wherever rust is present. As a surface pre-treatment for rusted structural steel, machinery, gates, railings, marine fittings, motor vehicle floors and all rusted surfaces where the complete removal of rust is not feasible or economical.

PART ID	DESCRIPTION
561606	EMER-TAN 4L
561607	EMER-TAN 20L



EMER-GARD PRIMER TYPE 2

- Quick drying anti-corrosive primer.

USES

Emer-Gard Primer Type 2 can be used for all new or old steel surfaces in industrial, commercial or domestic situations. Used where high durability is desired when only a minimum of surface preparation is possible, for practical, safety or reasons of economy.

PART ID	DESCRIPTION
561176	EMER-GUARD PRIMER TYPE 2 4L
561177	EMER-GUARD PRIMER TYPE 2 20L



EMER-ACRYLIC LOW SHEEN

- A High quality, water based acrylic, low sheen coating.

USES

Suitable for application to brickwork, cement render, concrete, blockwork, fibre cement sheeting, plaster board and pre-primed metals. As a general purpose, high opacity, durable protective, decorative coating mainly for exterior use, but also suited for interior surfaces.

PART ID	DESCRIPTION
561394	EMER-ACRYLIC LOW SHEEN TINTS 15L



CEMENTITIOUS & RESIN UNDERLAYS

DURAFLOOR LEVELTOP

- Floor underlay, self smoothing, levelling mortar for vinyl / carpet / timber (0 - 50 mm thickness).

USES

Durafloor Leveltop is designed as an internal high performance, easily installed underlay which forms a very smooth, hard surface for a variety of floor finishes including carpet, ceramic tiles, rubber, sheet vinyl and timber flooring.

PART ID	SUPPLY (KG)	PACK QTY
430092	15	50



DURAFLOOR LEVELTOP RAPID

- Floor underlay, trowellable, rapid hardening, levelling mortar for carpet / tiles / vinyl (0-50 mm thickness).

USES

Durafloor Leveltop Rapid is designed as a heavy duty floor repair compound which provides a very smooth surface allowing the smooth installation of carpet, ceramic tiles, sheet rubber, sheet vinyl and vinyl tiles.

PART ID	SUPPLY (KG)	PACK QTY
430105	20	50



DURAFLOOR LEVELBASE

- Floor underlay, economical sub-base build mortar (up to 200 mm thickness).

USES

Durafloor Levelbase is designed as a heavy duty sub-base underlay which forms a smooth, hard surface to be used under Durafloor Leveltop where deep sections are required.

PART ID	SUPPLY (KG)	PACK QTY
430095	20	50



DURAFLOOR FC

- Floor/wall coating, solvent free epoxy, fast cure.

USES

A heavy duty, 100% solids, non-skid surface coating for concrete and steel floors that is attractive and easily cleaned. Highly resistant to chemical attack and the action of vehicular and foot traffic.



PART ID	DESCRIPTION	PACK QTY
414504	Durafloor FC 4L Pack	20

DURAFLOOR SR

- Modified synthetic rubber based flooring coating

USES

Specifically formulated to provide quick drying, hard wearing, trafficable surfaces for floors including workshops, storerooms, undercover parking areas etc.



PART ID	SUPPLY (L)	PACK QTY
561311	20	10

DURAFLOOR PU

- Single pack, high build, clear high gloss, high abrasion resistant polyurethane coating.

USES

Durafloor PU is a high build coating, formulated for both interior and exterior applications to provide a clear, high gloss, high abrasion resistant finish.



PART ID	SUPPLY (L)	PACK QTY
400655	20	10

LIQUID HARDENERS

DURAFLOOR HD

- Liquid floor hardener / densifier / dustproofer - clear.

USES

On any new or existing internal concrete or masonry surface.



PART ID	SUPPLY (L)	PACK QTY
505001	20	10

DURAFLOOR HD-S

- Liquid floor hardener / densifier / stain resistant / sheen sealer - clear.

USES

On any new or existing internal concrete or masonry surface.



PART ID	SUPPLY (L)	PACK QTY
505003	20	10

TOPPINGS & COATINGS COLOUR PACKS

DURAFLOOR COLOUR PACKS

- Available in Durafloor SL, TF, HS, HP, FC & N



See Durafloor Colour Chart for colours.

PART ID	SUPPLY (L)	PACK QTY
440001	DURAFLOOR COL PAK BANKSIA 0.5KG	48
440010	DURAFLOOR COL PAK CREAM 0.5KG	48
440013	DURAFLOOR COL PAK FERN GREEN 0.5KG	48
440003	DURAFLOOR COLOUR PAK BLACK 0.5KG	48
440018	DURAFLOOR COLOUR PAK HARBOUR BLUE 0.5KG	48
440042	DURAFLOOR COLOUR PAK KOALA GREY 0.5KG	48
440075	DURAFLOOR COLOUR PAK LIGHT GREY BLUE 0.5KG	48
444000	DURAFLOOR COLOUR PAK OFF WHITE 0.5KG	48
440026	DURAFLOOR COLOUR PAK PASTEL GREY 0.5KG	48
440029	DURAFLOOR COLOUR PAK RASPBERRY 0.5KG	48
440070	DURAFLOOR COLOUR PAK SAFETY YELLOW 0.5KG	48
440031	DURAFLOOR COLOUR PAK SAND 0.5KG	48
440017	DURAFLOOR COLOUR PAK SILVER GREY 0.5KG	48
440059	DURAFLOOR COLOUR PAK WOOLWORTHS RED 0.5KG	48
440061	DURAFLOOR COLOUR PAK WOOLWORTHS GREY 0.5KG	48

FLOOR TOPPINGS

DURAFLOOR SL

- Floor topping, industrial, self smoothing epoxy resin system (2-4 mm thickness).

USES

Durafloor SL provides a dense, impervious, coloured and chemically resistant floor surface which is hygienic and easy to clean.



PART ID	DESCRIPTION	PACK QTY
405400	Durafloor SL Base Resin 16L Pack	12
405700	Durafloor SL Hardener 16L Pack	12
404045	Durafloor SL Fillers 10kg	-
404047	Durafloor SL Fillers 14kg	-

DURAFLOOR SLX

- Floor topping, industrial, self smoothing epoxy resin system for cold weather application (2-4 mm thickness).



PART ID	DESCRIPTION	PACK QTY
405900	Durafloor SLX Base Resin 16L Pack	12
405910	Durafloor SLX Hardener 16L Pack	12
404045	Durafloor SL Fillers 10kg	-
404047	Durafloor SL Fillers 14kg	-

DURAFLOOR TF

- Floor topping, trowel applied, high build epoxy resin system (5 mm thickness).



PART ID	DESCRIPTION	PACK QTY
405345	Durafloor TF Base Resin 15L	12
405350	Durafloor TF Hardener 5L	12
405355	Durafloor TF Fillers 20kg	12

AEGIS MSP

- Cementitious floor topping internal / external trafficable waterproofing surface (2-4 mm thickness).

USES

Aegis MSP is used to provide a strong and durable cementitious coating that can be applied to a wide variety of substrates, including concrete, concrete blocks, polystyrene blocks, aerated concrete blocks (AAC), asphalt and fibre cement.



PART ID	DESCRIPTION	PACK QTY
752003	Aegis MSP Coarse Grey 20kg	50
752001	Aegis MSP Fine Grey 20kg	50
750007	Aegis Surface Primer #1 20L	20

DURAFLOOR N (NOVOLAC)

- Highly chemically resistant Novolac epoxy clear binder produces various coating and topping application systems.

USES

Durafloor N is an all purpose, highly chemically resistant Novolac epoxy coating/topping system suitable for a number of surfaces including concrete, steel and masonry.



PART ID	DESCRIPTION	PACK QTY
401040	Durafloor N (Novolac) Base 15L	10
401045	Durafloor N (Novolac) Hardener 10L	10

DURAFLOOR V ANTI-SKID

- Heavy duty, flow applied, lightweight anti-skid surface dressing.



PART ID	DESCRIPTION	PACK QTY
400400	Durafloor V Anti-Skid Base 16L Pack	12
400405	Durafloor V Anti-Skid Hardener 16L Pack	12
400410	Durafloor V Anti-Skid Fillers 16L Pack	12
405760	Durafloor Heavy Duty Aggregate 25kg	20

COATINGS

DURAFLOOR HP

- Floor coating, high performance epoxy, solvent free, non-tainting.

USES

Durafloor HP is a heavy duty, industrial/commercial coating for concrete floors and walls that is attractive and easily cleaned. Highly resistant to chemical attack and the action of forklift vehicular and commercial type traffic.



PART ID	DESCRIPTION	PACK QTY
414501	Durafloor HP Base Resin 8L Pack	12
414502	Durafloor HP Hardener 8L Pack	12

DURAFLOOR HS

- Floor coating, economical, high build epoxy, 90% solids

USES

Durafloor HS is a heavy duty, commercial abrasion resistant treatment for concrete floors that is attractive and easily cleaned. Highly resistant to chemical attack and the action of commercial type traffic.



Suitable for use in wet areas where strict levels of hygiene and cleanliness are required or where chemicals are manufactured, spilled or are an integral part of the process.

PART ID	DESCRIPTION	PACK QTY
414600	Durafloor HS Base 8L Pack	12
414649	Durafloor HS Hardener 8L Pack	12

EMER-SEAL PU25

- High performance, flexible, one component, polyurethane joint sealant.

USES

Sealing joints in concrete panels, fibrous cement products, external cladding panels, blockwork and brickwork. Also in sealing joints around aluminium and timber door and window frames and between metal. Also suitable for sealing sawn joints up to 10 mm wide in concrete floors and pavements.



PART ID	DESCRIPTION
620555	EMER-SEAL PU 25 BEIGE 600ML (20/CTN)
620545	EMER-SEAL PU 25 BLACK 600ML (20/CTN)
620525	EMER-SEAL PU 25 CONC.GREY 600ML (20/CTN)
620560	EMER-SEAL PU 25 DRIFTWOOD 600ML(20/CTN)
620535	EMER-SEAL PU 25 SANDSTONE 600ML (20/CTN)
620530	EMER-SEAL PU 25 WHITE 600ML (20/CTN)

EMER-SEAL PU40

- Tough, abrasion resistant, one-component, polyurethane joint sealant, trafficable.

USES

For bonding or sealing joints between most construction materials, where a high bond strength is required.

PART ID	DESCRIPTION
620601	EMER-SEAL PU 40 BLACK 600ML (20/CTN)
620600	EMER-SEAL PU 40 CONC.GREY 600ML (20/CTN)
620606	EMER-SEAL PU 40 CONCRETE GREY 200L



EMER-SEAL CONSTRUCTION SILICONE HM

- Tough, pick and abrasion resistant, one-component silicone sealant / adhesive for civil and industrial applications.

USES

For bonding or sealing joints between most construction materials, where a high bond strength is required.

PART ID	SUPPLY (KG)
610375	EMER-SEAL CON SILICONE HM CON.GREY 600ML



EMER-SEAL 200

- High joint movement accommodation, two component, polyurethane joint sealant for water retaining structures.

USES

Sealing movement and static joints in water retaining structures, especially in applications likely to be subjected to biological degradation such as sludge digestion tanks, sewerage and water treatment plants, filtration and aeration tanks, water reservoirs, marine installations, also suitable for most building applications.

PART ID	DESCRIPTION
620610	EMER-SEAL 200 GREY 6L



EMER-SEAL CONSTRUCTION SILICONE

- High joint movement accommodation, one-component silicone joint sealant for façade applications.

USES

For sealing moving or static joints in precast or in-situ concrete, curtain walls and lightweight cladding, tilt-up slabs, brick, blockwork, marble and granite facades, most building materials.

PART ID	SUPPLY (KG)
630100	EMER-SEAL CONST SILICONE CON.GREY 600ML
630102	EMER-SEAL CONST SILICONE SPECIAL 600ML
630104	EMER-SEAL CONST SILICONE BLACK 600ML



EMER-SEAL CR

- Highly chemical resistant, fast cure, durable, one component joint sealant.

USES

For sealing expansion and construction joints exposed to aggressive chemical environments.

PART ID	DESCRIPTION
610501	EMER-SEAL CR CONCRETE GREY 600ML



EMER-SEAL MS

- One part elastomeric high performance paintable sealant.

USES

Sealing joints in concrete panels, marble, granite blockwork and brickwork. And also for use in sealing joints around aluminium and timber door and window frames and between metal and some plastics.

PART ID	DESCRIPTION
620515	EMER-SEAL MS GREY 600ML SAUSAGE



ROADSEAL SL

- Very low modulus, self-smoothing, one component silicone joint sealant.

USES

Sealing sawn joints in:

- Asphalt roads & pavements.
- Slot sealing of cable installations in asphalt and concrete pavements.
- Abutment joints between concrete and asphalt pavements.

PART ID	DESCRIPTION
610407	EMER-SEAL ROADSEAL SL CHAR.GREY 600ML
610403	EMER-SEAL ROADSEAL SL CHARCOAL GREY 20L
610406	EMER-SEAL ROADSEAL SL CHARCOAL GREY 200L



LEXEL

- Clear, all purpose gap sealant for interior and exterior use.

USES

The high clarity of Lexel (up to 19 times clearer than translucent silicone sealants) make it ideal for a wide range of gap filling and joint sealing applications where a high clarity sealant is required. Uses include, trim, countertops, splashbacks, sinks, tile thresholds, windows, doors, eaves, roof tiles, guttering, vents, ductwork, flashings and skylights.

PART ID	DESCRIPTION
810115	LEXEL CLEAR ALL PURPOSE 270G (12/CTN)



EMER-SEAL ROADSEAL

- High performance, low modulus, high joint movement accommodation, one component silicone rubber joint sealant.

USES

For sealing joints in concrete roads, runways, carparks and pavements.

PART ID	DESCRIPTION
610402	EMER-SEAL ROADSEAL CONCRETE GREY 600ML





STIFFJOINT

Semi-rigid, non-absorbent, closed cell polyethylene joint filler, 2.4m lengths, sold per each, priced per each.

PART ID	DESCRIPTION
2201045	STIFFJOINT 2.4M X 50MM X 10MM
2201050	STIFFJOINT 2.4M X 75MM X 10MM
2200980	STIFFJOINT 2.4M X 100MM X 10MM
2200990	STIFFJOINT 2.4M X 125MM X 10MM
2200995	STIFFJOINT 2.4M X 150MM X 10MM
2201030	STIFFJOINT 2.4M X 200MM X 10MM
2201035	STIFFJOINT 2.4M X 250MM X 10MM
2201040	STIFFJOINT 2.4M X 300MM X 10MM



Semi-rigid, non-absorbent, closed cell polyethylene joint filler, 2.4m x 1m sheets, sold per each, priced per each.

PART ID	DESCRIPTION
2201025	STIFFJOINT 2.4M X 1M X 7MM
2201000	STIFFJOINT 2.4M X 1M X 10MM
2201005	STIFFJOINT 2.4M X 1M X 12MM
2201010	STIFFJOINT 2.4M X 1M X 15MM
2201015	STIFFJOINT 2.4M X 1M X 20MM
2201020	STIFFJOINT 2.4M X 1M X 25MM
2201022	STIFFJOINT 2.4M X 1M X 30MM



Semi-rigid, non-absorbent, closed cell polyethylene joint filler, cut to size, cut up from sheets, sold per m², priced per m².

PART ID	DESCRIPTION
SPSJ10	STIFFJOINT 10MM SPECIALS / M2
SPSJ12	STIFFJOINT 12MM SPECIALS / M2
SPSJ15	STIFFJOINT 15MM SPECIALS / M2
SPSJ20	STIFFJOINT 20MM SPECIALS / M2
SPSJ25	STIFFJOINT 25MM SPECIALS / M2
SPSJ40	STIFFJOINT 40MM SPECIALS / M2



Semi-rigid, non-absorbent, closed cell polyethylene joint filler, sold in lengths only, priced per each.

PART ID	DESCRIPTION
2500910	STIFFJOINT 1.2M X 75MM X 10MM
2500915	STIFFJOINT 1.4M X 75MM X 10MM
2500920	STIFFJOINT 1.5M X 75MM X 10MM
2500850	STIFFJOINT 1.4M X 100MM X 10MM
2200975	STIFFJOINT 1.5M X 100MM X 10MM
2500865	STIFFJOINT 1.4M X 125MM X 10MM
2500870	STIFFJOINT 1.5M X 125MM X 10MM



EMER-BAND

- Highly flexible, large joint capable, chemically resistant, joint bandage membrane system.

USES

Emer-Band may be used to seal joints in car park decks, podiums, balconies, walkways and other elevated structures, where the Emer-Band can be protected from mechanical damage by a cover plate. It can also be used for over-strapping joints in basements, subways, tunnels, refineries and substructures in general.

PART ID	DESCRIPTION
620430	EMER-BAND TAPE 25MX100MMX1MM
620441	EMER-BAND TAPE 20MX150MMX2MM
620432	EMER-BAND TAPE 25MX200MMX1MM
620442	EMER-BAND TAPE 25MX200MMX2MM



CONWRAP

- Reinforced bituminous sealing tape for pre-cast concrete.

USES

Conwrap is an externally applied tape for sealing joints in pre-cast elements such as box culverts. Conwrap is normally used in conjunction with internally placed Conseal CS231 sealing strip.

PART ID	DESCRIPTION
2500116	CONWRAP 100MM /METRE
2500119	CONWRAP 150MM /METRE
2500120	CONWRAP 200MM / METRE
2500125	CONWRAP 250MM / METRE



JOINTFLEX

Flexible, closed cell polyethylene joint filler, available in 25m rolls, plain, sold in rolls only, priced per each.

PART ID	DESCRIPTION
2200680	JOINTFLEX 25M X 50MM X 10MM
2200690	JOINTFLEX 25M X 75MM X 10MM
2200650	JOINTFLEX 25M X 100MM X 10MM
2200655	JOINTFLEX 25M X 125MM X 10MM
2200660	JOINTFLEX 25M X 150MM X 10MM
2200665	JOINTFLEX 25M X 200MM X 10MM
2200670	JOINTFLEX 25M X 250MM X 10MM
2200675	JOINTFLEX 25M X 300MM X 10MM
2200651	JOINTFLEX 25M x 1M x 10MM
2200695	JOINTFLEX WHITE 25M X 75MM X 10MM
2200700	JOINTFLEX WHITE 25M X 100MM X 10MM
2200692	JOINTFLEX WHITE ADH 25M X 75MM X 10MM
2200694	JOINTFLEX WHITE ADH 25M X 100MM X 10MM



CELLFLEX

- Bitumen impregnated fibreboard, expansion joint filler board range.

USES

Cellflex is suitable for forming joints between in-situ and pre-cast concrete construction. Forming structural expansion and separation joints in concrete pavements and floors, roads, ramps and runways, pedestrian areas, concrete retaining walls and bridges, concrete basement structures and subways.

PART ID	DESCRIPTION
2200336	CELLFLEX 2.4M X 60MM X 8.5
2200335	CELLFLEX 2.4M X 75MM X 8.5MM
2200310	CELLFLEX 2.4M X 100MM X 8.5MM
2200340	CELLFLEX 2.4M X 125MM X 8.5MM
2200315	CELLFLEX 2.4M X 150MM X 8.5MM
2200325	CELLFLEX 2.4 X 200MM X 8.5MM
2200330	CELLFLEX 2.4M X 300MM X 8.5MM
2200350	CELLFLEX 2.44M X 900MM X 8.5MM
2200313	CELLFLEX 2.44M X 100MM X 12MM
661300	CELLFLEX 12MMX2.2MX1.22M



HYDROCOR TYPE 2

- Non expanding cork joint filler

USES

Forming and filling expansion and static joints in pavements and slabs, roads, bridges and carparks, internal and external traffic areas.

PART ID	DESCRIPTION
SPNEC10	HYDROCOR TYPE 2 10MM / M2
SPNEC12	HYDROCOR TYPE 2 12MM / M2
SPNEC15	HYDROCOR TYPE 2 15MM / M2
SPNEC16	HYDROCOR TYPE 2 16MM / M2
SPNEC20	HYDROCOR TYPE 2 20MM / M2
SPNEC25	HYDROCOR TYPE 2 25MM / M2
SPNEC30	HYDROCOR TYPE 2 30MM / M2



HYDROCOR TYPE 3

- Range of self expanding cork filler

USES

Forming and filling expansion and static joints in water retaining structures, water excluding structures, roads, bridges and carparks, internal or external traffic areas. Hydrocor comprises a range of joint fillers made from cork granules bound together with insoluble, synthetic resin.

PART ID	DESCRIPTION
SPSEC10	HYDROCOR TYPE 3 10MM / M2
SPSEC12	HYDROCOR TYPE 3 12MM / M2
SPSEC15	HYDROCOR TYPE 3 15MM / M2
SPSEC16	HYDROCOR TYPE 3 16MM / M2
SPSEC20	HYDROCOR TYPE 3 20MM / M2
SPSEC25	HYDROCOR TYPE 3 25MM / M2
SPSEC30	HYDROCOR TYPE 3 30MM / M2



EMER-SEAL BACKING ROD

- Economical, low density, open cell, polyurethane, sealant backing rod range

USES

Time saving – its flexibility, elasticity and round shape allows quick, efficient placement into both even and uneven joints. One size of diameter foam can be used in a range of joint sizes.

Optimal sealant curing – open cell construction allows air to reach both sides of the sealant, ensuring uniform curing.

PART ID	DESCRIPTION
665200	EMER-SEAL BACKING ROD 16MM X 150M ROLL
665201	EMER-SEAL BACKING ROD 22MMX100M ROLL
665202	EMER-SEAL BACKING ROD 29MMX60M ROLL
665203	EMER-SEAL BACKING ROD 38MMX30M ROLL
665204	EMER-SEAL BACKING ROD 50MMX20M ROLL



BOND BREAKER TAPE

- Polyethylene tape, for isolating sealants from concrete and joint fillers

USES

Used in joint sealing applications to ensure sealant only adheres to two faces of the joint.

Polyethylene tape for isolating sealant and eliminating adhesion to filler boards

PART ID	DESCRIPTION
671060	BOND BREAKING TAPE 12MM X 66M ROLL
671061	BOND BREAKING TAPE 15MM X 66M ROLL
671062	BOND BREAKING TAPE 20MM X 66M ROLL
671063	BOND BREAKING TAPE 25MM X 66M ROLL
671064	BOND BREAKING TAPE 50MM X 66M ROLL
665160	BOND BREAKING TAPE 12MM
665161	BOND BREAKING TAPE 15MM
665162	BOND BREAKING TAPE 20MM
665163	BOND BREAKING TAPE 25MM
665159	BOND BREAKING TAPE 50MM



EXPANDAFOAM BACKING ROD

- Medium density, closed cell polyethylene backing rod range

USES

Expandafoam is a closed cell polyethylene foam rod supplied in circular section cords of varying diameters.

PART ID	DESCRIPTION
665120	EXPANDAFOAM ROD 6MMX250M ROLL
665121	EXPANDAFOAM ROD 10MMX250M ROLL
665122	EXPANDAFOAM ROD 13MMX100M ROLL
665123	EXPANDAFOAM ROD 15MMX100M ROLL
665124	EXPANDAFOAM ROD 20MMX60M ROLL
665125	EXPANDAFOAM ROD 25MMX50M ROLL
665126	EXPANDAFOAM ROD 30MMX50M ROLL
665127	EXPANDAFOAM ROD 40MMX2M STRIP
665128	EXPANDAFOAM ROD 50MMX2M STRIP



SLIPJOINT

- Movement and rotation pads for load bearing joints

USES

Slipjoints are designed to take movement on a load bearing structure such as corbel/slab and brick interfaces where a low friction sliding interface is required. They ensure that the load transfer is correctly through the centre of the horizontal joint thus eliminating any chance of fretting at the edge due to the rotation of the slab. Live load deflection of the slab by means of settlement of adjacent columns/walls and piers is also diminished.

PART ID	DESCRIPTION
2200951	SLIPJOINT 90MM X 3M / EACH
2200952	SLIPJOINT 110MM X 3M / EACH
2200953	SLIPJOINT 150MM X 3M / EACH
2200955	SLIPJOINT 190MM X 3M / EACH
2200954	SLIPJOINT 200MM X 3M / EACH
2200956	SLIPJOINT 230MM X 3M / EACH
2200957	SLIPJOINT 250MM X 3M / EACH
2200958	SLIPJOINT 270MM X 3M / EACH
2200959	SLIPJOINT 300MM X 3M / EACH

GALVANISED SLIPJOINT

- Economical pre-greased galvanised slipjoints

USES

To take movement on a light load and less critical load bearing structure such as corbels, brick or masonry block applications.

PART ID	DESCRIPTION
2200950	SLIPJOINT CAVITY WALL 230MM X 3M / EACH
2200962	SLIPJOINT CAVITY WALL 270MM X 3M

PVC WATERSTOPS

Centrally and externally placed, pvc waterstop profiles for use in cast in-situ concrete.

PART ID	DESCRIPTION
720301	SUPERCAST H/F 150MMX15M ROLL
720302	SUPERCAST H/F 200MMX15M ROLL
720303	SUPERCAST H/F 250MMX12M ROLL
720330	SUPERCAST R/G 'R' 150MMX12M ROLL
720340	SUPERCAST R/G 'R' 200MMX12M ROLL
720350	SUPERCAST R/G 'S' 250MMX12M ROLL
720360	SUPERCAST R/G 'R' 250MMX12M ROLL



EARTHSHIELD TPV WATERSTOP

- Chemical resistant waterstops.

USES

Thermoplastic elastomeric rubber waterstops (ie. weldable TPV/TPER) are a specialty product for critical chemical, industrial and environmental applications. Conventional plasticised PVC waterstops do not offer the long term resistance to a broad range of aggressive chemicals, solvents and hot petroleum oils. Typical applications are primary and secondary containment, refineries, mining facilities, fueling depots, chemical plants and acid storage.

PART ID	DESCRIPTION
2200291	JP636 EARTHSHIELD WATERSTOP / M 150mm Centre Bulb
2200295	JP936 EARTHSHIELD WATERSTOP / M 230mm Centre Bulb
2200286	JP211 EARTHSHIELD WATERSTOP / M 230mm Rear Guard



ECCOVOID

- Collapsible void former.

USES

To separate concrete slabs, ground beams and pile caps etc from unstable expansive soils that can exert significant swelling pressures on structural foundations. Eccovoid provide a temporary support for the concrete during curing but collapse over time as the cardboard product bio-degrades naturally.

PART ID	DESCRIPTION
2501019	ECCOVOID VOIDFORMER 2.4MX.8MX40MM
2501024	ECCOVOID VOIDFORMER 2.4MX.8MX50MM
2501018	ECCOVOID VOIDFORMER 2.4MX.8MX75MM
2501017	ECCOVOID VOIDFORMER 2.4MX.8MX100MM
2501021	ECCOVOID VOIDFORMER 2.4MX.8MX150MM
2501022	ECCOVOID VOIDFORMER 2.4MX.8MX175MM
2501023	ECCOVOID VOIDFORMER 2.4MX.8MX200MM



SWELLABLE WATERSTOP

- High expansion butyl bentonite based hydrophilic waterstop for cast in-situ concrete.

PART ID	DESCRIPTION
2201110	SUPERSWELL 47B 25MM X 20MM



CONSEAL 231

- Low expansion sealing gasket for joints in pre-cast concrete.

PART ID	DESCRIPTION
2500240	CONSEAL231 19MMX12MMX12MM/M
2500245	CONSEAL 231 25MMX25MMX12MM/M



HYDROTITE

- Premium grade, water swellable, waterstop range for use in cast in-situ concrete.

PART ID	DESCRIPTION
2200560	HYDROTITE DSS0220 ADH BACK /LM
2200550	HYDROTITE CJ0725-3K ADH / LM
2200555	HYDROTITE CJ1020-2K ADH /LM



LEAKMASTER


- Gun applied, water-swellaable, waterstop paste.

PART ID	DESCRIPTION
2200785	LEAKMASTER / 320ML CARTRIDGE




STENCIL PATTERNS

PART ID	DESCRIPTION
ST10DIA	Fauxtex Stencil - 100m - 10" Diamond Tile
ST10DIA50	Fauxtex Stencil - 50m - 10" Diamond Tile
ST8QUA	Fauxtex Stencil - 100m - 8" Quarry Tile
ST8QUA50	Fauxtex Stencil - 50m - 8" Quarry Tile
STANT	Fauxtex Stencil - 100m - ANTIQUE TILE
STANT50	Fauxtex Stencil - 50m - ANTIQUE TILE
STASH	Fauxtex Stencil - 100m - ASHLAR SLATE
STASH50	Fauxtex Stencil - 50m - ASHLAR SLATE
STBAS	Fauxtex Stencil - 100m - BASKET WEAVE
STBAS50	Fauxtex Stencil - 50m - BASKET WEAVE
STBLO	Fauxtex Stencil - 100m - BLOCK
STBLO50	Fauxtex Stencil - 50m - BLOCK
STBRI	Fauxtex Stencil - 100m - BRICK
STBRI50	Fauxtex Stencil - 50m - BRICK
STBUS	Fauxtex Stencil - 100m - BUSHROCK
STBUS50	Fauxtex Stencil - 50m - BUSHROCK
STCLA	Fauxtex Stencil - 100m - CLASSIC HERRINGBONE
STCLA50	Fauxtex Stencil - 50m - CLASSIC HERRINGBONE
STCOB	Fauxtex Stencil - 100m - COBBLESTONE
STCOB50	Fauxtex Stencil - 50m - COBBLESTONE
STCON	Fauxtex Stencil - 100m - CONVICT BRICK
STCON50	Fauxtex Stencil - 50m - CONVICT BRICK
STENG	Fauxtex Stencil - 100m - ENGLISH COBBLE
STENG50	Fauxtex Stencil - 50m - ENGLISH COBBLE
STEUR	Fauxtex Stencil - 100m - EUROPEAN FAN
STEUR50	Fauxtex Stencil - 50m - EUROPEAN FAN
STFLA	Fauxtex Stencil - 100m - FLAGSTONE
STFLA50	Fauxtex Stencil - 50m - FLAGSTONE
STKEY	Fauxtex Stencil - 100m - KEYSTONE
STKEY50	Fauxtex Stencil - 50m - KEYSTONE
STLAR	Fauxtex Stencil - 100m - LARGE TILE
STLAR50	Fauxtex Stencil - 50m - LARGE TILE
STRAN	Fauxtex Stencil - 100m - RANDOM BLUESTONE
STRAN50	Fauxtex Stencil - 50m - RANDOM BLUESTONE
STREG	Fauxtex Stencil - 100m - REGAL TILE
STREG50	Fauxtex Stencil - 50m - REGAL TILE
STRUS	Fauxtex Stencil - 100m - RUSTIC BRICK
STRUS50	Fauxtex Stencil - 50m - RUSTIC BRICK




Cobblestone

Av. Brick Size 235 x 126mm




Convict Brick

Av. Brick Size 240 x 237mm




Classic Herringbone

Av. Brick Size 195 x 90mm




10" Diamond Tile

Tile Size 262 x 262mm,
Diamond Size 100 x 100mm




Block

Brick Size 398 x 192mm




Rustic Brick

Av. Brick Size 230 x 140mm




Brick

Brick Size 226 x 105mm




Bushrock

Av. Brick Size 230 x 225mm




European Fan

Av. Brick Size 130 x 100mm




Basket Weave

Brick Size 195 x 90mm




Ashlar Slate

Av. Brick Size 257 x 155mm




Flagstone

Av. Brick Size 250 x 180mm




Regal Tile

Tile Size 267 x 138mm




Random Bluestone

Av. Brick Size 197 x 140mm




8" Quarry Tile

Tile Size 195 x 195mm




Large Tile

Tile Size 264 x 264mm




Keystone

Av. Brick Size 200 x 150mm



Antique Tile

Tile Size 264 x 264mm




English Cobble

Av. Brick Size 300 x 100mm


(Av) = sizes within the stencil pattern may vary, therefore the average size is an indication only.

STENCIL CIRCLES/OTHER


PART ID	DESCRIPTION
WCOM	Stencil-Rosette Star Compass/pce (Req 4)
WCIRS	Stencil-Rosette Small 900mm/pce (Req 1)
WCIRM	Stencil-Rosette Med. 1600mm/pce (Req 2)
RCIRL	Stencil-Rosette Large 2200mm/pce (Req 4)
WCIRC	Stencil-Rosette Cobble 1600mm/pce (Req 2)
WDIA	Stencil-Rosette Diamd 1600mm/pce (Req 2)



Cobble Rosette
Diameter 1.6m
Av. Brick Size 165 x 78mm




Star Compass
Diameter 1.6m (N,S,E,W
Letters Available)



Rosette
Diameter 0.9m/1.6m/2.2m

STENCIL HEADER COURSE

PART ID	DESCRIPTION
HCBRI	Fauxtex Header Course - Brick
HCBRI50	Fauxtex Header Course Brick 50m
HCCOB	Fauxtex Header Course - Cobble
HCCOB50	Fauxtex Header Course Cobble 50m
HCEDG	Fauxtex Header Course - Edge Brick
HCKEY	Fauxtex Header Course - Keystone
HCLAR	Fauxtex Header Course - Large Tile



Edge Brick Header
Brick Size 225 x 105mm



Cobble Header
Brick Size 195 x 130mm



Brick Header Course (Soldier Course)
Av. Brick Size 195mm x 105mm



Large Tile Header
Brick Size 265 x 265mm



Keystone Header
Av. Brick Size 180 x 100mm



STAMPED IMPRESSION CONCRETE

STAMPED IMPRESSION CONCRETE



Colour: Bluestone
Release: Charcoal



Bushrock

Colour: Beige
Release: Charcoal




Ashlar Slate
Cove Finish

Colour: Cream
Release: Coffee Brown



Walkway Slate

Colour: Grey
Release: Charcoal

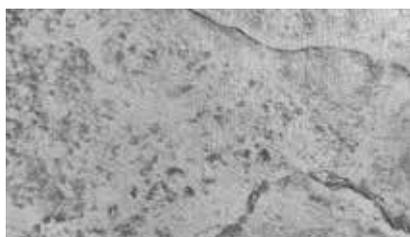


Seamless

Colour: Bluegum
Release: Charcoal



Brindabella

Colour: Bluestone
Release: Charcoal

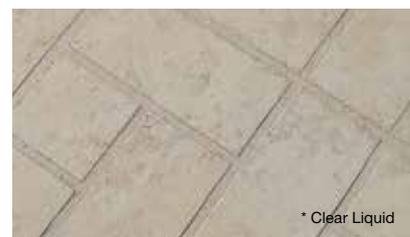


Seamless Stamp with
Flander Weave Stencil


Colour: Cream
Release: Neutral*

* Clear Liquid


Mix and match your choice of base colour with a release agent to achieve a unique finish reflecting your personal style. Patterns shown are indicative only as stamp mats may vary from outlet to outlet & effects vary depending on the order & direction the mats are placed.

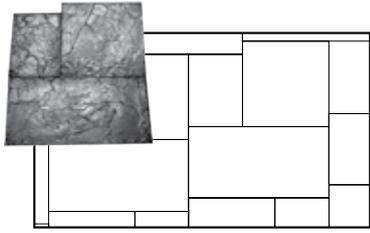


Regal

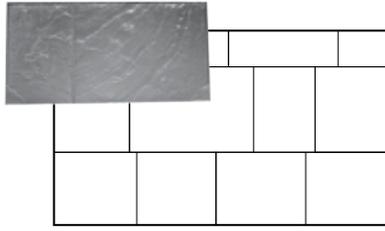


Walkway Slate

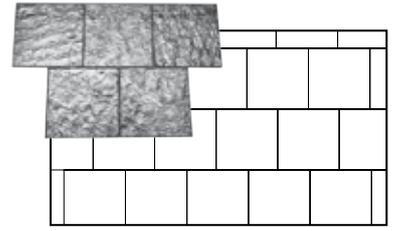


Slate Tile

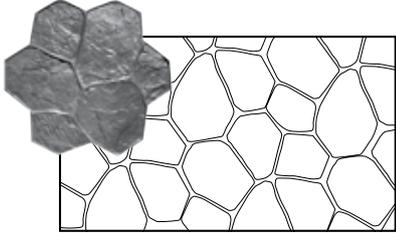


Bushrock (Crazy Stone)

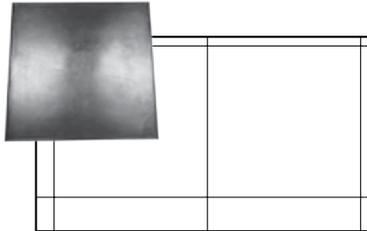


Quarry Tile

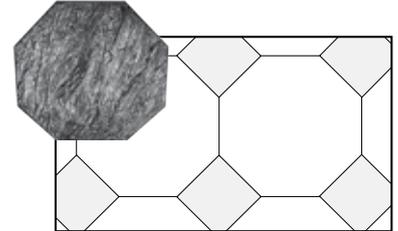


Mediterranean Tile

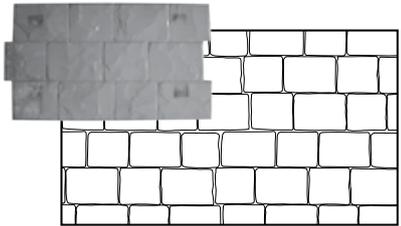

London Cobble

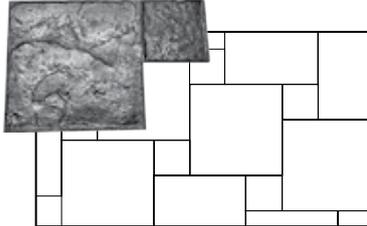


Flagstone

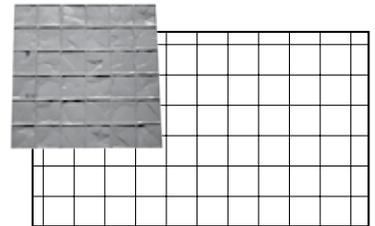


Granite




Timber Deck

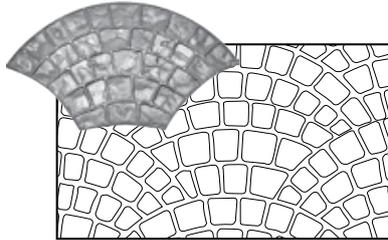

European Fan

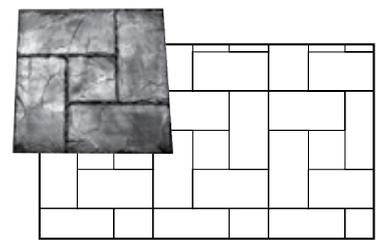


Flemish

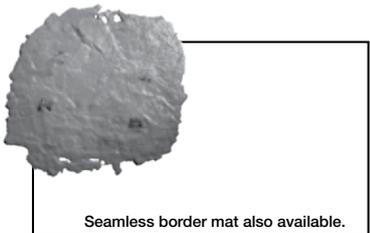


Seamless border mat also available.


Seamless

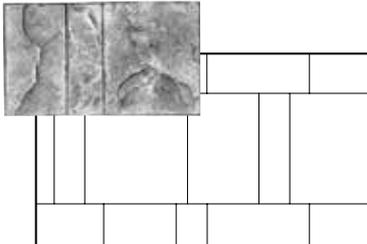

Federation

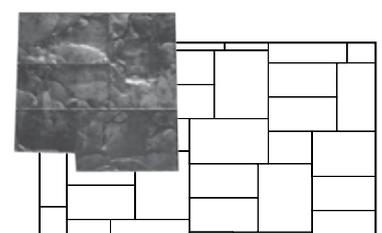

Ashlar Slate

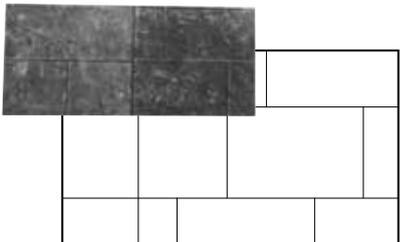

Brindabella



Antique Brick Straight Border



Antique Brick Curved Border



Brick Border

DECORATIVE CONCRETE PRODUCTS

COLOUR DISPERSANTS

- For Resurfacing.

PART ID	DESCRIPTION
CTBLU	Covertex - Dispersant - Bluestone
CTBRA	Covertex - Dispersant - Brazil Nut
CTBRI	Covertex - Dispersant - Brick red
CTBUR	Covertex - Dispersant - Burgundy
CTCAR	Covertex - Dispersant - Caramel
CTCHA	Covertex - Dispersant - Charcoal
CTCHO	Covertex - Dispersant - Chocolate
CTCOF	Covertex - Dispersant - Coffee
CTDAR	Covertex - Dispersant - Dark Terracotta
CTDES	Covertex - Dispersant - Desert Sand
CTFRE	Covertex - Dispersant - French Grey
CTGUN	Covertex - Dispersant - Gun Metal
CTLIG	Covertex - Dispersant - Light Terracotta
CTMER	Covertex - Dispersant - Merino
CTSAH	Covertex - Dispersant - Sahara
CTSAN	Covertex - Dispersant - Sandstone
CTSB	Covertex - Dispersant - Sandy Beige
CTWHI	Covertex - Dispersant - White
DSCHE	Designer Colour Tint - Chestnut
DSLAT	Designer Colour Tint - Latte
DSLIT	Designer Colour Tint - Lite Mocha
DSPEA	Designer Colour Tint - Pearl Lustre
DSSIV	Designer Colour Tint - Silver Sands
MTBUF	Mastertone Powder Tint - Vintage Buff
MTGUM	Mastertone Powder Tint - Bluegum
MTSTOB	Mastertone Powder Tint - Bluestone
MTCHA	Mastertone Powder Tint - Charcoal
MTGRY	Mastertone Powder Tint - Grey



COLOUR HARDENERS

- For new concrete and Stamped Impression Concrete.

PART ID	DESCRIPTION
FTBLAM	Fauxtex - Multi Mix - Black
FTBLUM	Fauxtex - Multi Mix - Bluestone
FTBRAM	Fauxtex - Multi Mix - Brazil Nut
FTBRIM	Fauxtex - Multi Mix - Brick Red
FTBURM	Fauxtex - Multi Mix - Burgundy
FTCARM	Fauxtex - Multi Mix - Caramel
FTCHAM	Fauxtex - Multi Mix - Charcoal
FTCHEM	Fauxtex - Multi Mix - Chestnut
FTCHOM	Fauxtex - Multi Mix - Chocolate
FTCOFM	Fauxtex - Multi Mix - Coffee
FTDARM	Fauxtex - Multi Mix - Dark Terracotta
FTDESM	Fauxtex - Multi Mix - Desert Sand
FTFREM	Fauxtex - Multi Mix - French Grey
FTGUNM	Fauxtex - Multi Mix - Gun Metal
FTLATM	Fauxtex - Multi Mix - Latte
FTLIGM	Fauxtex - Multi Mix - Light Terracotta
FTLITM	Fauxtex - Multi Mix - Lite Mocha
FTMERM	Fauxtex - Multi Mix - Merino
FTSAHM	Fauxtex - Multi Mix - Sahara
FTSBM	Fauxtex - Multi Mix - Sandy Beige
MPGUM	Stampcrete - Bluegum
MPBLU	Stampcrete - Bluestone
MPCHA	Stampcrete - Charcoal
MPCRE	Stampcrete - Cream
MPGRE	Stampcrete - Grey
MPBUF	Stampcrete - Vintage Buff



BASE POWDER

- For Resurfacing.

PART ID	DESCRIPTION
NXTGENBC	COVACRETE NXTGEN BASE CREAM 20KG



LIQUID RELEASE AGENTS

- For Stamped Impression Concrete.

PART ID	DESCRIPTION
RALCL	Cobblestone - Release Agent - Liquid - Clear
RALBLA	Cobblestone - Release Agent - Liquid - Black
RALBLU	Cobblestone - Release Agent - Liquid - Bluestone
RALCHA	Cobblestone - Release Agent - Liquid - Charcoal
RALCIN	Cobblestone - Release Agent - Liquid - Cinnamon
RALCOF	Cobblestone - Release Agent - Liquid - Coffee Brown
RALMAR	Cobblestone - Release Agent - Liquid - Marigold



POWDER RELEASE AGENTS

- For Stamped Impression Concrete.

PART ID	DESCRIPTION
FTRABLU10	Fauxtex - Release Agent - Powder - BLUESTONE
FTRACHA10	Fauxtex - Release Agent - Powder - CHARCOAL
FTRACHO10	Fauxtex - Release Agent - Powder - CHOCOLATE
FTRACOF10	Fauxtex - Release Agent - Powder - COFFEE
FTRANEU10	Fauxtex - Release Agent - Powder - NEUTRAL



CONCRETE SEALERS

ACRYLIC SEALER

Standard sealer used for stencil & stamped surfaces. Good all-round concrete sealer.

- Durable
- Easy to apply & maintain
- Semi gloss finish
- High clarity
- Tintable



USES

Used as a high quality, gloss protective finish over decorative and other concrete and masonry surfaces. For best results, first prime with LustreSeal Superbond.

PART ID	SUPPLY (L)
ACR5	5
ACR20	20
ACR200	200

EXTENDED WEAR PLUS

Hard wearing, high gloss sealer.

- High durability
- Excellent fuel, oil, mould & fungi resistance
- Semi gloss - high clarity
- Excellent marking resistance

USES

Used for extended longevity in place of Acrylic Sealer for most concrete and masonry surfaces. Provides superior protection from the ingress of dirt, mould, fungi, fuel and oil. High quality wet-look finish. For best results, first prime with LustreSeal Superbond.

PART ID	SUPPLY (L)
EXT20	20
EXT200	200



MATT FINISH SEALER

When a natural look is more appealing than a gloss.

- Natural low lustre
- Good marking resistance
- Hard wearing
- Stylish alternative
- Tintable

USES

Used as a natural low sheen finish coat for most decorative concrete or masonry surfaces. Popular as an alternative finish for internal floors and also as a natural look finish for resurfaced concrete, stamped impression concrete and stencil concrete. Low lustre masks minor marking and scuffing. For best results, first prime with Lustre Seal Superbond. (Not to be used as a first coat primer)



PART ID	SUPPLY (L)
ACRM20	Matt Finish Sealer - 20L

SUPERBOND

Same day prime sealer.

- Excellent moisture tolerance
- Priming sealer
- High penetration & adhesion
- Flexible
- Ideal for use as resealing primer
- Great for sealing exposed aggregate

USES

Use as same day sealer/primer for concrete and primer for masonry and natural stone surfaces (for porous stone - test before use). Also suitable for resealing - provides essential flexibility between finish coats (See Reseal Guide). Must be over-coated with a finish sealer upon surface curing (with the exception of exposed aggregate).



PART ID	SUPPLY (L)
SUP20	20
SUP200	200

LUSTRESEAL M20

- Premium Polyurethane, High Solids Sealer

USES

The toughest sealer in the Lustre Seal range - very high gloss and extremely hard. Suitable over Mastershield polymer flooring, Covacrete and other concrete (incl. Stamp/Stencil) and masonry surfaces in thoroughly dry conditions. Also ideal over polished concrete. M20 is a moisture curing single pack polyurethane.



PART ID	SUPPLY (L)
UA20A	UA20 Urethane Acrylic - 8.7Lt Part A
UA20B	UA20 Urethane Acrylic - 1.25Lt Part B
M20-20	Polyurethane M20 - 20L

ACRYLIC CLEAR BASE SEALER



PART ID	SUPPLY (L)
TINTCLEAR	Acrylic Clear Base Sealer - Part A - 18L

SEALER TINTS

PART ID	SUPPLY (L)
LSAPR	LUSTRESEAL TINT APRICOT 1LTR
LSBAR	LUSTRESEAL TINT BARLEY 1LTR
LSBEI	LUSTRESEAL TINT BEIGE 1LTR
LSBLA	LUSTRESEAL TINT BLACK 1LTR
LSBLU	LUSTRESEAL TINT BLUESTONE 1LTR
LSBRI	LUSTRESEAL TINT BRICK RED 1LTR
LSBRO	LUSTRESEAL TINT BRONZE 1LTR
LSBUR	LUSTRESEAL TINT BURGUNDY 1LTR
LSCHA	LUSTRESEAL TINT CHARCOAL 1LTR
LSCIN	LUSTRESEAL TINT CINNAMON 1LTR
LSCOF	LUSTRESEAL TINT COFFEE BROWN 1LTR
LSCRE	LUSTRESEAL TINT CREAM 1LTR
LSGRY	LUSTRESEAL TINT GREY 1LTR
LSGUM	LUSTRESEAL TINT BLUE GUM 1LTR
LSLIG	LUSTRESEAL TINT LIGHT TERRACOTTA 1LTR
LSMAR	LUSTRESEAL TINT MARIGOLD 1LTR
LSNUT	LUSTRESEAL TINT NUTMEG 1LTR
LSROS	LUSTRESEAL TINT BLUSHING ROSE 1LTR
LSSAH	LUSTRESEAL TINT SAHARA SAND 1LTR
LSSAN	LUSTRESEAL TINT SAND 1LTR
LSTER	LUSTRESEAL TINT TERRACOTTA 1LTR
LSVIN	LUSTRESEAL TINT VINTAGE BUFF 1LTR
LSWHI	LUSTRESEAL TINT WHITE 1LTR
TINTBLA	Sealer Tint - Part B - Black 2L
TINTBLU	Sealer Tint - Part B - Bluestone 2L
TINTBRA	Sealer Tint - Part B - Brazil Nut 2L
TINTBRI	Sealer Tint - Part B - Brick Red 2L
TINTBUR	Sealer Tint - Part B - Burgundy 2L
TINTCAR	Sealer Tint - Part B - Caramel 2L
TINTCCR	Sealer Tint - Part B - Coffee Cream 2L
TINTCHA	Sealer Tint - Part B - Charcoal 2L
TINTCHO	Sealer Tint - Part B - Chocolate 2L
TINTCOF	Sealer Tint - Part B - Coffee 2L
TINTDAR	Sealer Tint - Part B - Dark Terracotta 2L
TINTDES	Sealer Tint - Part B - Desert Sand 2L
TINTFRE	Sealer Tint - Part B - French Grey 2L
TINTGUN	Sealer Tint - Part B - Gun Metal 2L
TINTLIG	Sealer Tint - Part B - Light Terracotta 2L
TINTMER	Sealer Tint - Part B - Merino 2L
TINTNUT	Sealer Tint - Part B - Nutmeg 2L
TINTSAH	Sealer Tint - Part B - Sahara 2L
TINTSAN	Sealer Tint - Part B - Sandstone 2L
TINTSB	Sealer Tint - Part B - Sandy Beige 2L
TINTWHI	Sealer Tint - Part B - White 2L
DCBLU	Intatone Stain - Blue
DCYEL	Intatone Stain - Yellow
DCRED	Intatone Stain - Red
DCWHI	Intatone Stain - White
DCBRO	Intatone Stain - Brown
DCGRE	Intatone Stain - Green
DCBLA	Intatone Stain - Black
DCMER	Intatone Stain - Marigold



CRUSHED GLASS

PART ID	SUPPLY (L)
AC4046	Crushed Glass Antislip Clear 5Kg



INTERNAL FLOORING

SOLVENT

PART ID	SUPPLY (L)
SOL4	4
SOL20	20



WATER & OIL REPELLANT

PART ID	SUPPLY (L)
REP4	Water & Oil Repellant - 4L



TYRE MARK REMOVER

PART ID	SUPPLY (L)
TMR2	Tyre Mark Remover / Restorer - 2L



MASTERSHIELD M50

- Economical Epoxy Flooring or Surface Primer.

USES

A two pack Aqueous Epoxy that can be used as a primer or as a base for epoxy flooring. May be tinted (aqueous tints), flaked or sprayed in contrasting flecks. Provides a low gloss, satin finish. Highly economical epoxy flooring. FOR INSIDE USE - Special application for outside use.

PART ID	SUPPLY (L)
MS50A	Mastershield - M50 - 5L - Part A - Opaque Base NSI
MS50NTA	Mastershield - M50 - 5L - Part A - Neutral Base NSI NLA
MS50B	Mastershield - M50 - 5L - Part B - For Opaque and Neutral Bases NSI



MASTERSHIELD M90

- Premium Epoxy Commercial Flooring Product.

USES

Premium Polymer flooring product. May be tinted, flaked and other decorative inclusions. Clear product that may be used to suspend objects, graphics or lighting for a novelty feature floor. Chemical resistant - ideal for commercial and industrial floors. FOR INSIDE USE - Special application for outside use.

PART ID	SUPPLY (L)
MS90A	Mastershield - M90 - 6L - Part A
MS90B	Mastershield - M90 - 4L - Part B
MS90C	Mastershield - M90 - 2L - Part C - Fast Cure Hardener NLA
MS90SKIT	Mastershield - M90 - 5L Kit
MS90MVA	Mastershield - M90 - MV Part A



MASTERSHIELD FLAKE

Decorative flooring polymer flake.

USES

Mastershield Polymer Flake is used in decorative Polymer Flooring.

PART ID	SUPPLY (L)
PFFLA	Mastershield Flake - Flake Various NSI



MASTERTONE LIQUID

PART ID	SUPPLY (L)
MTBIS	Mastershield - Aqueous Tint - Biscuit
MTBON	Mastershield - Aqueous Tint - Bone
MTCLA	Mastershield - Aqueous Tint - Clay
MTMUS	Mastershield - Aqueous Tint - Musk
MTOUT	Mastershield - Aqueous Tint - Outback
MTSIL	Mastershield - Aqueous Tint - Silver Grey
MTTAN	Mastershield - Aqueous Tint - Tan
MTBRWHT	Mastershield - Aqueous Tint - White
MTBRBL	Mastershield - Aqueous Tint - Black
MTBRTY	Mastershield - Aqueous Tint - Bright Yellow
MTBRTR	Mastershield - Aqueous Tint - Bright Red
MTBRTG	Mastershield - Aqueous Tint - Bright Green
MTBRTB	Mastershield - Aqueous Tint - Bright Blue



MODIFIERS

PART ID	SUPPLY (L)
DURMOD	Duratex Modifier 20ltr





EXPORT CATALOGUE

“ We’ve got
the gear
you need ”



Contact Us export@parchem.com.au

National Head Office: 7 Lucca Road, Wyong NSW 2259 +61 24350 5000

The range of products may vary, please contact Parchem for the range of products in stock.


parchem
www.parchem.com.au