

# FLO-KWIP


The Ideal 'Puddle Sucker' Submersible Pump  
For Rental, Contractors, Builders, Concreters etc..



## Model AL45

The Ideal "Puddle-Sucker" submersible pump for Rental, Concreters, Builders etc...  
Cellars, foundations and Basements...

- Coated aluminum outer case for low weight and effective cooling.
- Pumps down to only 3mm !!!.
- Non-return device built into base.
- Polyurethane impeller and rubber lined volute for excellent abrasion resistance.
- Mechanical seal.
- Rubber base.
- Standard with 10 meter cable.
- Quality construction and finish.
- Choice of 1" or 2" discharge.
- Thermal protection on motor.

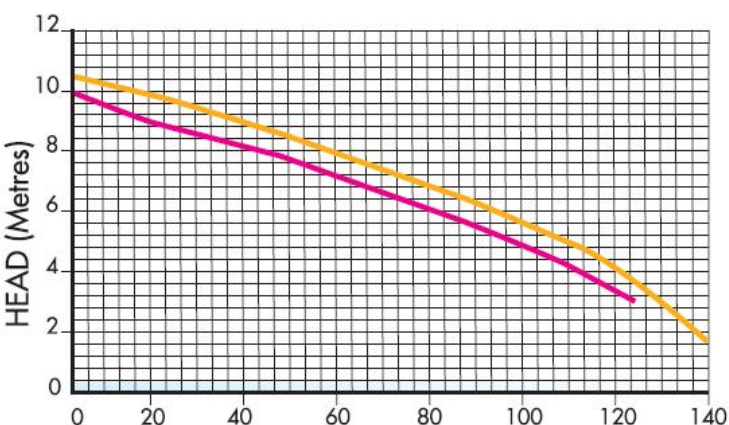

### TECHNICAL SPECIFICATIONS...

**Kw:** 0.45

**V:** 240

**Max Flow:** 120LPM

**H<sub>z</sub>:** 50

**Max Head:** 10.5m

**Weight:** 10.2Kg + cable

**Diameter:** 19cm

**Height:** 32cm

**Discharge:** AL45-2: 2"FBSP, AL45-1: 1" MBSP

**Max Fluid Temp:** 40°C

**Max Operating Submersible Depth:** 5m

■ 1" Curve

■ 2" Curve

\*Specifications are subject to  
change without notice

P: +61 (3) 8805 0500 F: +61 (3) 9801 0299

E: sales@toolkwippumps.com

www.toolkwippumps.com.au



**TOOLKWIP  
PUMPS**